


ADVANTECH



IO Control

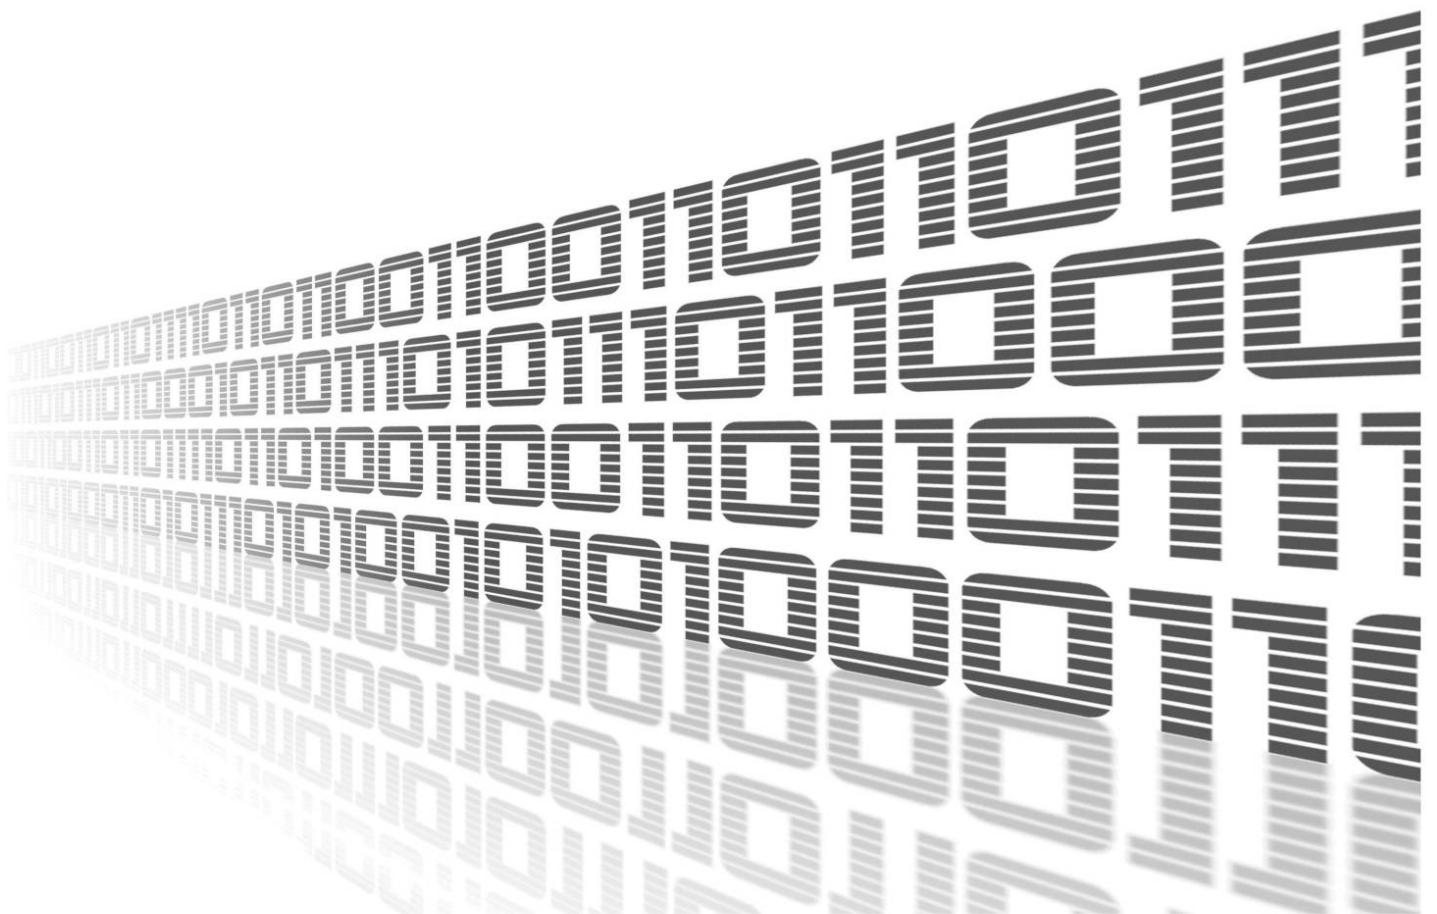

© 2025 Advantech Czech s.r.o. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photography, recording, or any information storage and retrieval system without written consent. Information in this manual is subject to change without notice, and it does not represent a commitment on the part of Advantech.

Advantech Czech s.r.o. shall not be liable for incidental or consequential damages resulting from the furnishing, performance, or use of this manual.

All brand names used in this manual are the registered trademarks of their respective owners. The use of trademarks or other designations in this publication is for reference purposes only and does not constitute an endorsement by the trademark holder.

Used symbols



Important

Important — Indicates a risk to personal safety or potential damage to the router. Follow these instructions precisely to prevent injury or equipment damage.



Warning

Warning — Highlights conditions that may cause malfunction, loss of data, or unexpected behavior in specific situations. Read carefully before proceeding.



Info

Info — Provides helpful tips, context, or references that improve understanding but are not strictly required to complete the task.



Code Example



Code Example - Copy-pasteable configuration snippets or CLI commands.

Contents

1. Module Description	1
2. Installation	2
3. Usage and Configuration	3
3.1 Overview	3
3.2 System Log	3
3.3 Configuration	4
4. Related Documents	5

List of Figures

1 Router Apps	2
2 IO Control Overview Page	3
3 Global Configuration Page	4

List of Tables

1 Description of Configuration Settings	4
---	---

1. Module Description

Warning

The *IO Control* Router App is not included in the standard router firmware. For installation instructions, please refer to the main Configuration Manual (see Chapter [Related Documents](#)).

The *IO Control* Router App provides a simple interface for monitoring and controlling the state of binary inputs and outputs (I/O) on Advantech routers. Binary I/O ports are used to interact with external devices, allowing the router to read simple on/off states (e.g., from a switch or sensor) and to control external devices (e.g., activate a light or relay). This module specifically enables remote control of a binary input via SMS messages.

2. Installation

The *IO Control* Router App is installed via the router's web interface. Navigate to the *Customization* → *Router Apps* page. Here, you can use the *Manual Installation* section to upload and install the app package file (*.tgz).

Once the installation is complete, the *IO Control* module will appear in the *Installed Apps* list. Clicking on its name will open the app's web interface, which includes the *Status* and *Configuration* pages detailed in the following sections.

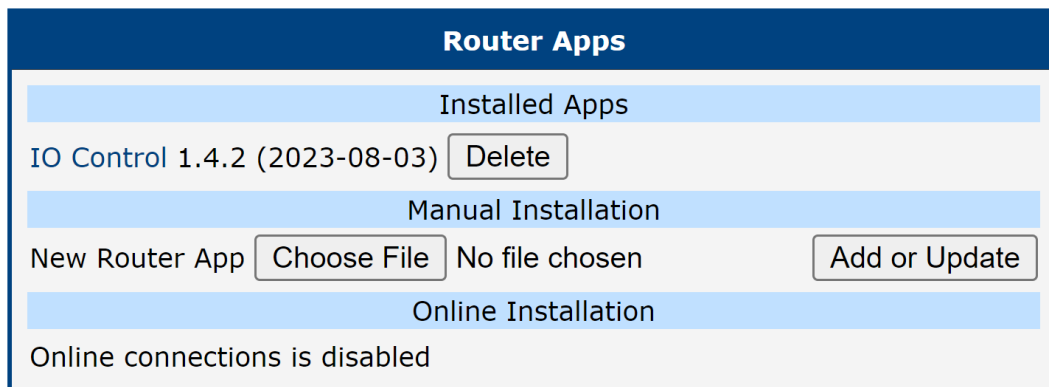


Figure 1: Router Apps

3. Usage and Configuration

3.1 Overview

The *Overview* page displays the current state of the router's binary inputs and outputs. By default, inputs are active (*On*) to monitor external signals. Outputs are inactive (*Off*) by default but can be manually activated by clicking the corresponding *On* button.

The figure below shows an example of the *Overview* page for a router with two binary inputs and two binary outputs.

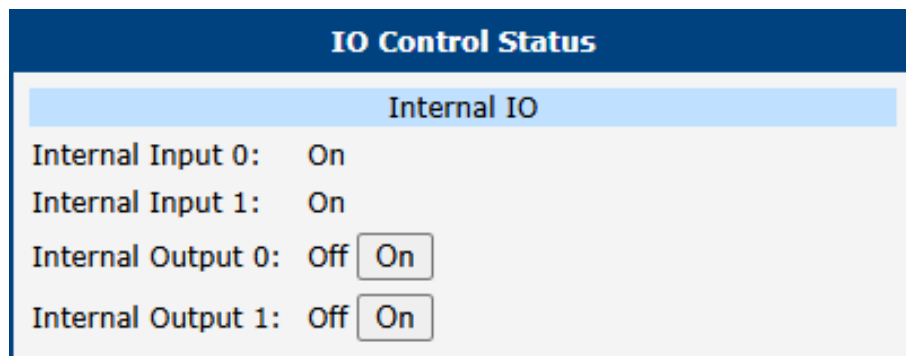


Figure 2: IO Control Overview Page

3.2 System Log

The *System Log* section displays system-level messages from the router, which can be useful for diagnostics and monitoring the behavior of the *IO Control* app. Note that this is the same log available via the main router menu at *Status* → *System Log*.

3.3 Configuration

The *Configuration* page allows you to enable and configure SMS notifications for binary input state changes. These settings determine which phone numbers receive alerts and the content of those messages.

IO Control Configuration

☐ Enable IO Control

First Phone Number

Second Phone Number

BIN0 High State SMS

BIN0 Low State SMS

BIN1 High State SMS

BIN1 Low State SMS

Apply

Figure 3: Global Configuration Page

Item	Description
Enable IO Control	Check this box to enable the IO Control functionality. When enabled, the router will send an SMS notification when the state of a monitored binary input changes.
First Phone Number	The primary phone number to which an informational SMS will be sent upon a binary input state change.
Second Phone Number	An optional, secondary phone number to which an informational SMS will be sent.
BINx High State SMS	Define the text of the SMS message to be sent when binary input number x changes to a high (active) state.
BINx Low State SMS	Define the text of the SMS message to be sent when binary input number x changes to a low (inactive) state.

Table 1: Description of Configuration Settings



Info

This Router App is designed to send SMS notifications based on changes to binary input states. For direct remote control of binary outputs or for more advanced I/O automation, consider using shell scripts or other dedicated Router Apps.

4. Related Documents

[1] IO Control Manual Pages: https://sming.readthedocs.io/en/latest/_inc/Sming/Libraries/IOControl/index.html#

You can obtain product-related documents on *Engineering Portal* at icr.advantech.com address.

To get your router's *Quick Start Guide*, *User Manual*, *Configuration Manual*, or *Firmware* go to the [Router Models](#) page, find the required model, and switch to the *Manuals* or *Firmware* tab, respectively.

The *Router Apps* installation packages and manuals are available on the [Router Apps](#) page.

For the *Development Documents*, go to the [Development](#) page.