


ADVANTECH



Serial over LAN



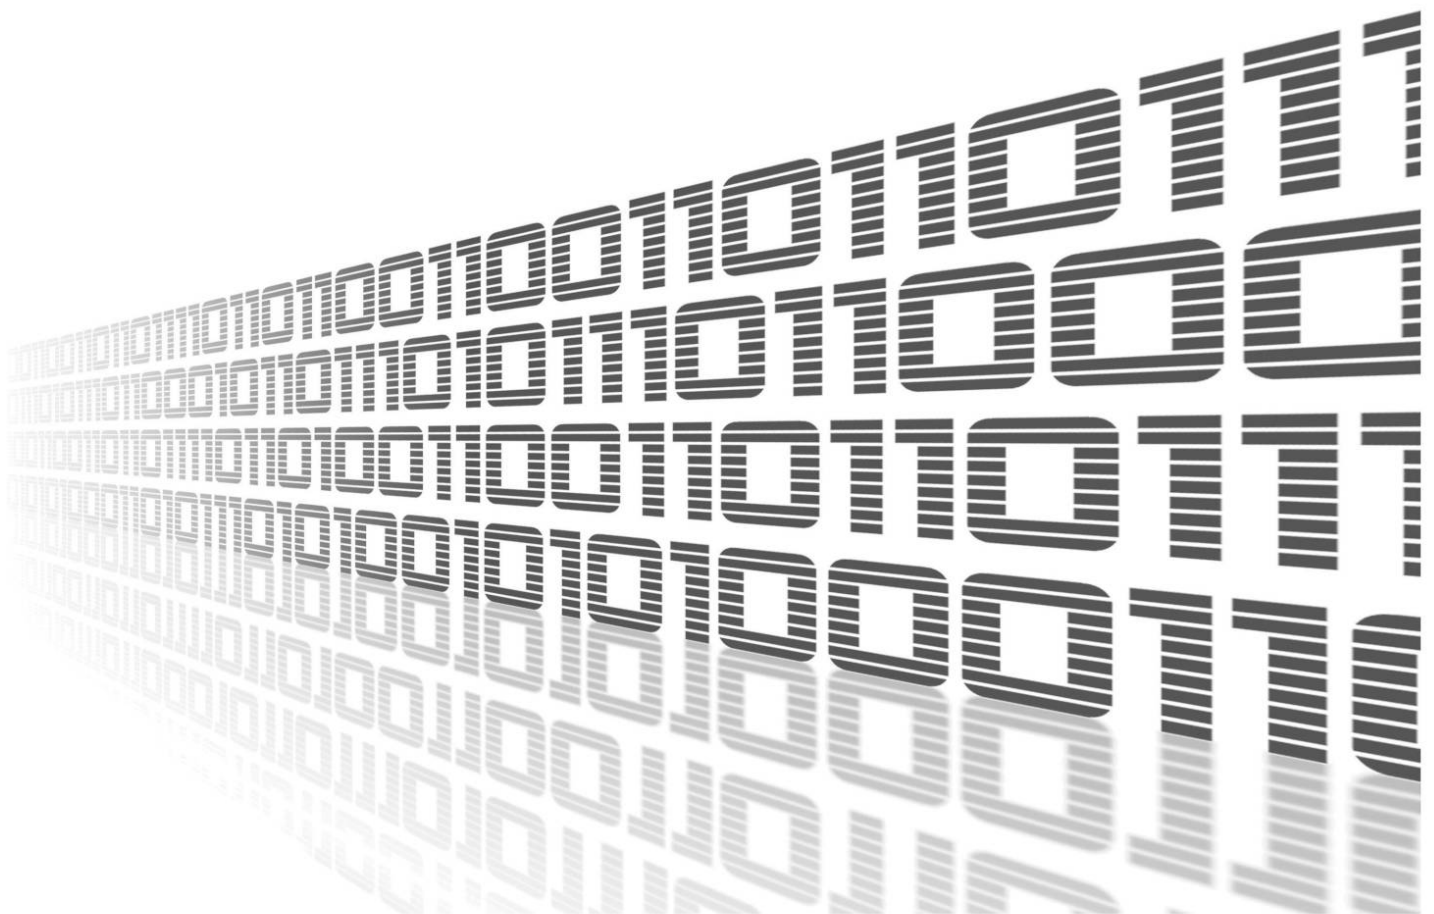

© 2024 Advantech Czech s.r.o. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photography, recording, or any information storage and retrieval system without written consent. Information in this manual is subject to change without notice, and it does not represent a commitment on the part of Advantech.


Advantech Czech s.r.o. shall not be liable for incidental or consequential damages resulting from the furnishing, performance, or use of this manual.


All brand names used in this manual are the registered trademarks of their respective owners. The use of trademarks or other designations in this publication is for reference purposes only and does not constitute an endorsement by the trademark holder.

Used symbols

 *Danger* – Information regarding user safety or potential damage to the router.

 *Attention* – Problems that can arise in specific situations.

 *Information* – Useful tips or information of special interest.

 *Example* – Example of function, command or script.

Contents

1. Changelog	1
1.1 Serial over LAN Changelog	1
2. Module Usage	2
2.1 Module Description	2
2.2 Web Interface	2
2.3 Module Configuration	3
2.4 System Log	4
3. Related Documents	5

List of Figures

1 Main menu	2
2 Configuration page	3

List of Tables

1 Configuration items description	4
---	---

1. Changelog



This Router App has been tested on a router with firmware version 6.3.10. After updating the router's firmware to a higher version, make sure that a newer version of the Router App has not also been released, as it is necessary to update it as well for compatibility reasons.

1.1 Serial over LAN Changelog

v1.0.0 (2017-07-24)

- First release.

v1.0.1 (2017-07-25)

- Increased size of internal buffers.

v1.0.2 (2017-08-21)

- Fixed non valid telnet IAC in received data.

v1.0.3 (2017-11-12)

- Upgraded ser2net to version 3.5.

v1.0.4 (2018-02-28)

- Increased chardelay-max to prevent splitting of the data to more packets.

v1.0.5 (2018-03-07)

- Added option "Intercharacter Delay" into configuration.
- Improved stopping of ser2net from init script.

v1.0.6 (2018-09-27)

- Added expected ranges of values to JavaScript error messages.

v1.0.7 (2019-01-02)

- Added licenses information

v1.1.0 (2020-10-01)

- Updated CSS and HTML code to match firmware 6.2.0+

v1.2.0 (2022-11-03)

- Reworked license information

v4.6.1 (2024-03-20)

- Upgraded ser2net to version 4.6.1
- Fit versioning to ser2net upstream
- Added description and summary files
- Recompiled with ModulesSDK 2.1.4
- Unified menu categories

2. Module Usage

2.1 Module Description



Router app *Serial over LAN* is not contained in the standard router firmware. Uploading of this router app is described in the Configuration manual (see Chapter [Related Documents](#)).

Configuration, which can be done in this router app, extends the basic configuration of the serial interface to communicate through the network, which can be configured in the GUI of the router (Configuration → Expansion Port). The main benefit is that this module supports the configuration of the *Telnet* protocol supporting the [RFC 2217](#) specification.

RS232, RS485/422 or MBUSD serial interfaces of a router can be used for this purpose. These interfaces are available as an expansion ports, see [\[1\]](#), [\[2\]](#) and [\[3\]](#). Some models of *Advantech* routers can have serial interface built-in by default. USB port of the router equipped with the USB to serial converter (FTDI) can also be used by this router app.

As a client's application suitable for this purpose can be, for example, used [Serial to Ethernet Connector](#) application from *Eltima Software* or [HW VSP](#) application from *HW group*.

2.2 Web Interface

Once the installation of the module is complete, the module's GUI can be invoked by clicking the module name on the *Router apps* page of router's web interface. The main menu of module's GUI is shown on figure 1.

Left part of this GUI contains the menu with *Status* menu section, followed by *Configuration* menu section which contains the module's configuration page named as *Port1*, *Port2* and *Port USB*. *Customization* menu section contains only the *Return* item, which switches back from the module's web page to the router's web configuration pages.

Status
System Log
Configuration
Port 1
Port 2
Port USB
Customization
Return

Figure 1: Main menu

2.3 Module Configuration

There are three configuration forms under *Configuration* menu section, for *Port 1*, *Port 2* and *Port USB*. The first two forms are determined for configuration of communication parameters of devices connected to the router’s serial port 1 resp. port 2. *Port USB* form is determined for configuration of a device connected to the USB port equipped with a USB to serial converter. Layout for all three configuration forms is the same, see the figure 2.

Figure 2: Configuration page

All configuration items are described in table 1.

Item	Description
Enable serial to network proxy	If enabled, proxy functionality for given port is turned on.
TCP Port	TCP port for the connection. Has to be unique for every serial interface.
Command Port	Dedicated port for command communication can be set. Supported only if the state below is set to <i>Telnet</i> . This functionality must also be supported by client’s SW.
State	Choose the <i>raw</i> or <i>Telnet</i> protocol for the communication. Note that <i>raw</i> protocol does not support RFC 2217.
Timeout	The time (in seconds) before the port will be disconnected if there is no activity on it. A zero value disables this function.
Intercharacter Delay	If the character delay in received data of serial communication is equal to the value set in this field, the data will be sent without waiting for the internal buffer fulfillment. This value can be set from 2 up to 20 characters.

Continued on the next page

Continued from previous page

Item	Description
Baudrate	Choose the baudrate for serial communication. Available values are: 300, 1200, 2400, 4800, 9600, 192000, 38400, 57600 and 115200 pbs.
Parity	Choose <i>none</i> , <i>even</i> or <i>odd</i> parity for serial communication.
Stopbits	Choose 1 or 2 stopbits value for serial communication.
Databits	Choose 7 or 8 databits value for serial communication.
Apply	Button to save and apply all changes made in this configuration form.

Table 1: Configuration items description

2.4 System Log

Log messages are available on *System Log* page, under *Status* menu section. This log contains log messages for this router app, but also all other router's system messages and is exactly the same as the system log available on *System Log* page in router's *Status* menu section.

3. Related Documents

- [1] Advantech Czech: **Expansion Port RS232 – User Manual** (MAN-0020-EN)
- [2] Advantech Czech: **Expansion Port RS485/422 – User Manual** (MAN-0025-EN)
- [3] Advantech Czech: **Expansion Port MBUSD – User Manual** (MAN-0030-EN)

You can obtain product-related documents on *Engineering Portal* at icr.advantech.com address.

To get your router's *Quick Start Guide*, *User Manual*, *Configuration Manual*, or *Firmware* go to the [Router Models](#) page, find the required model, and switch to the *Manuals* or *Firmware* tab, respectively.

The *Router Apps* installation packages and manuals are available on the [Router Apps](#) page.

For the *Development Documents*, go to the [DevZone](#) page.