


ADVANTECH



WoL Gateway

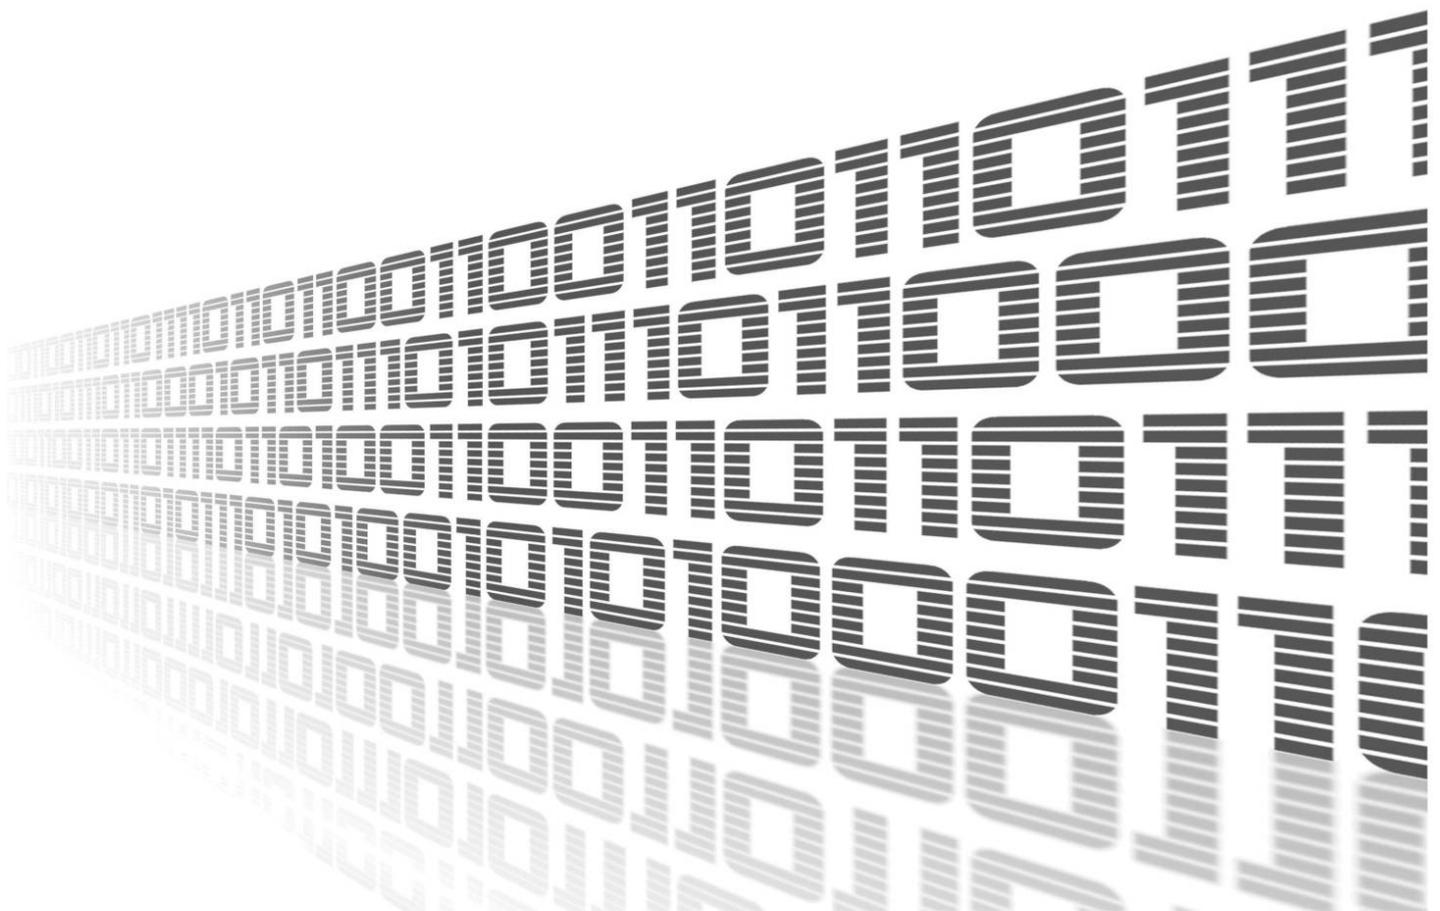

© 2024 Advantech Czech s.r.o. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photography, recording, or any information storage and retrieval system without written consent. Information in this manual is subject to change without notice, and it does not represent a commitment on the part of Advantech.

Advantech Czech s.r.o. shall not be liable for incidental or consequential damages resulting from the furnishing, performance, or use of this manual.

All brand names used in this manual are the registered trademarks of their respective owners. The use of trademarks or other designations in this publication is for reference purposes only and does not constitute an endorsement by the trademark holder.

Used symbols

 *Danger* – Information regarding user safety or potential damage to the router.

 *Attention* – Problems that can arise in specific situations.

 *Information* – Useful tips or information of special interest.

 *Example* – Example of function, command or script.

Contents

1. Changelog	1
1.1 WoL Gateway Changelog	1
2. Description of router app	2
3. Configuration of router app	3
4. Related Documents	4

List of Figures

1 Web interface	2
2 Configuration form	3

List of Tables

1 Description of items in web interface	3
---	---

1. Changelog



This Router App has been tested on a router with firmware version 6.3.10. After updating the router's firmware to a higher version, make sure that a newer version of the Router App has not also been released, as it is necessary to update it as well for compatibility reasons.

1.1 WoL Gateway Changelog

v1.0.0 (2012-09-27)

- First release.

v1.0.1 (2013-02-18)

- Fixed issue with starting DHCP server.

v1.0.2 (2014-01-03)

- Added support of FW 4.0.0+.

v1.1.0 (2017-03-16)

- Recompiled with new SDK.

v1.1.1 (2018-09-27)

- Added expected ranges of values to JavaScript error messages.

v1.2.0 (2020-10-01)

- Updated CSS and HTML code to match firmware 6.2.0+

v1.3.0 (2022-11-03)

- Reworked license information

v1.3.1 (2024-02-10)

- Added description and summary files
- Recompiled with ModulesSDK 2.1.2

v1.3.2 (2024-03-12)

- Fixed bug in DHCP server configuration

2. Description of router app



Router app *WoL Gateway* is not contained in the standard router firmware. Uploading of this router app is described in the Configuration manual (see Chapter [Related Documents](#)).

This module allows router to listen to communication on the specified UDP port, receive packets from a predetermined source (*Source IP*) and forward these packets to appropriate address (*Destination IP*) as a broadcast. The module also puts the final touches to DHCP server configuration.

For configuration *WoL Gateway* router app is available web interface, which is invoked by pressing the module name on the *Router Apps* page of the router web interface. The left part of the web interface (ie. menu) contains only the *Return* item, which switches this web interface to the interface of the router.

WoL Gateway

WoL Gateway Configuration	
<input type="checkbox"/> Enable WoL Gateway	
Source IP	<input type="text"/>
Destination IP	<input type="text" value="192.168.1.255"/>
UDP Port	<input type="text" value="1230"/>
FTP Server IP	<input type="text"/>
Domain Name	<input type="text"/>
Domain Name Servers	<input type="text"/> <input type="text"/> <input type="text"/>
<input type="button" value="Apply"/>	

Figure 1: Web interface

3. Configuration of router app

The actual configuration of this router app is performed via the form on the right side. The first item in this form – *Enable WoL Gateway* – is used to activate these router app. Meaning of other items is described in the table below:

Item	Description
Source IP	Source IP address (packets are received from this address)
Destination IP	Destination IP address (packets are forwarded to this address)
UDP Port	UDP port used for communication
FTP Server IP	IP address of an FTP server (corresponds to DHCP parameter 161)
Domain Name	Domain Name
Domain Name Servers	Specifies up to three DNS servers

Table 1: Description of items in web interface

All changes will take effect after pressing the *Apply* button.

The screenshot shows a web interface titled "WoL Gateway Configuration". At the top, there is a blue header with the title. Below the header, there is a checkbox labeled "Enable WoL Gateway". Underneath, there are several input fields: "Source IP" (empty), "Destination IP" (containing "192.168.1.255"), "UDP Port" (containing "1230"), "FTP Server IP" (empty), "Domain Name" (empty), and "Domain Name Servers" (three empty input boxes). At the bottom left, there is an "Apply" button.

Figure 2: Configuration form

4. Related Documents

You can obtain product-related documents on *Engineering Portal* at icr.advantech.com address.

To get your router's *Quick Start Guide*, *User Manual*, *Configuration Manual*, or *Firmware* go to the [Router Models](#) page, find the required model, and switch to the *Manuals* or *Firmware* tab, respectively.

The *Router Apps* installation packages and manuals are available on the [Router Apps](#) page.

For the *Development Documents*, go to the [DevZone](#) page.