

# Hardware Manual

## 5G Industrial Router

### ICR-4272



© 2026 Advantech Czech s.r.o. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photography, recording, or any information storage and retrieval system, without prior written consent. Information in this manual is subject to change without notice and does not represent a commitment by Advantech.

Advantech Czech s.r.o. shall not be liable for any incidental or consequential damages arising from the use, performance, or furnishing of this manual.

All brand names used in this manual are registered trademarks of their respective owners. The use of trademarks or other designations in this publication is for reference purposes only and does not imply endorsement by the trademark holder.

# Used symbols



## Important

**Important** — Indicates a risk to personal safety or potential damage to the router. Follow these instructions precisely to prevent injury or equipment damage.



## Warning

**Warning** — Highlights conditions that may cause malfunction, loss of data, or unexpected behavior in specific situations. Read carefully before proceeding.



## Info

**Info** — Provides helpful tips, context, or references that improve understanding but are not strictly required to complete the task.

# Contents

|                                                        |           |
|--------------------------------------------------------|-----------|
| <b>1. Product Overview</b>                             | <b>1</b>  |
| 1.1 Document Contents                                  | 1         |
| 1.2 Product Introduction                               | 2         |
| 1.3 Hardware Overview                                  | 3         |
| 1.4 Order Codes                                        | 5         |
| 1.5 Product Revisions                                  | 5         |
| 1.6 Package Contents                                   | 6         |
| 1.7 Product Dimensions                                 | 7         |
| 1.8 Mounting Recommendations                           | 9         |
| 1.9 Wall Mounting                                      | 10        |
| 1.10 DIN Rail Mounting                                 | 11        |
| 1.11 Product Label                                     | 12        |
| 1.12 First Use                                         | 13        |
| <b>2. Hardware Functionality</b>                       | <b>14</b> |
| 2.1 SIM Card Slots                                     | 14        |
| 2.2 Antennas Interfaces                                | 15        |
| 2.3 Bluetooth                                          | 15        |
| 2.4 Ethernet Interfaces                                | 16        |
| 2.5 Power Supply                                       | 17        |
| 2.6 Low Power Mode                                     | 18        |
| 2.7 I/O Port Interfaces                                | 19        |
| 2.8 Serial Interfaces                                  | 20        |
| 2.9 USB 3.0 Port                                       | 22        |
| 2.10 microSD Card Reader                               | 23        |
| 2.11 LED Status Indication                             | 24        |
| 2.12 Reset Functions                                   | 25        |
| <b>3. Technical Parameters</b>                         | <b>26</b> |
| 3.1 Basic Technical Parameters                         | 26        |
| 3.2 Standards and Regulations                          | 27        |
| 3.3 Type Testing and Environmental Conditions          | 28        |
| 3.4 Parameters of Cellular Module                      | 29        |
| 3.4.1 Antenna Mapping                                  | 30        |
| 3.5 Parameters of GNSS                                 | 31        |
| 3.6 Parameters of Wi-Fi                                | 32        |
| 3.7 Parameters of Bluetooth                            | 33        |
| 3.8 Parameters of I/O Ports                            | 33        |
| 3.9 Parameters of Serial Interfaces                    | 34        |
| 3.10 System Configuration                              | 34        |
| <b>Appendix A: Troubleshooting</b>                     | <b>35</b> |
| <b>Appendix B: Customer Support</b>                    | <b>37</b> |
| <b>Appendix C: Regulatory &amp; Safety Information</b> | <b>38</b> |
| <b>Appendix D: Related Documents</b>                   | <b>40</b> |

# List of Figures

|    |                                                                                   |    |
|----|-----------------------------------------------------------------------------------|----|
| 1  | Router hardware overview – front view . . . . .                                   | 3  |
| 2  | Router hardware overview – rear view . . . . .                                    | 4  |
| 3  | Router dimensions – front, top and right view with wall-mounting holder . . . . . | 7  |
| 4  | Router dimensions – front, top and right view with DIN rail clip . . . . .        | 8  |
| 5  | Rotated wall-mounting clips . . . . .                                             | 10 |
| 6  | Default position of the DIN rail clip . . . . .                                   | 11 |
| 7  | Removing router from the DIN rail . . . . .                                       | 11 |
| 8  | Product label . . . . .                                                           | 12 |
| 9  | SIM card insertion . . . . .                                                      | 14 |
| 10 | Ethernet connector pinout (RJ45 socket) . . . . .                                 | 16 |
| 11 | Power connector pinout . . . . .                                                  | 17 |
| 12 | Grounding screw position . . . . .                                                | 17 |
| 13 | I/O connector pinout . . . . .                                                    | 19 |
| 14 | Functional block diagram of the digital interface . . . . .                       | 19 |
| 15 | Both interfaces in RS232 mode . . . . .                                           | 20 |
| 16 | Both interfaces in RS485 mode . . . . .                                           | 21 |
| 17 | USB 3.0 connector pinout . . . . .                                                | 22 |
| 18 | microSD card insertion . . . . .                                                  | 23 |
| 19 | Resetting the router . . . . .                                                    | 25 |

# List of Tables

|    |                                                     |    |
|----|-----------------------------------------------------|----|
| 1  | Router hardware overview – front view . . . . .     | 3  |
| 2  | Router hardware overview – rear view . . . . .      | 4  |
| 3  | Order code overview . . . . .                       | 5  |
| 4  | HW revision history . . . . .                       | 5  |
| 5  | Package contents . . . . .                          | 6  |
| 6  | Ethernet connector pinout (RJ45 socket) . . . . .   | 16 |
| 7  | Power connector pinout . . . . .                    | 17 |
| 8  | I/O ports pinout . . . . .                          | 19 |
| 9  | First serial interface – RS232 mode . . . . .       | 20 |
| 10 | Second serial interface – RS232 mode . . . . .      | 20 |
| 11 | First serial interface – RS485 mode . . . . .       | 21 |
| 12 | Second serial interface – RS485 mode . . . . .      | 21 |
| 13 | USB 3.0 connector pinout description . . . . .      | 22 |
| 14 | microSD card technical specifications . . . . .     | 23 |
| 15 | LED status indication . . . . .                     | 24 |
| 16 | Basic technical parameters . . . . .                | 26 |
| 17 | Standards and regulations . . . . .                 | 27 |
| 18 | Type testing and environmental conditions . . . . . | 28 |
| 19 | Technical parameters of cellular module . . . . .   | 29 |
| 20 | Cellular module antenna mapping . . . . .           | 30 |
| 21 | Technical parameters of GNSS . . . . .              | 31 |
| 22 | Technical parameters of Wi-Fi . . . . .             | 32 |
| 23 | Technical parameters of Bluetooth . . . . .         | 33 |
| 24 | Technical parameters of digital input . . . . .     | 33 |
| 25 | Technical parameters of serial interfaces . . . . . | 34 |
| 26 | System configuration . . . . .                      | 34 |

# 1. Product Overview

## 1.1 Document Contents

This manual provides comprehensive hardware information for Advantech ICR-4272 routers, covering the following key areas:

- **Product Overview** – Includes essential product details such as ordering codes, product revision history, package contents, physical dimensions, and mounting instructions.
- **Hardware Functionality** – Offers a detailed description of all hardware components, including SIM card slots, antenna connectors, Ethernet ports, power supply options, LED status indicators, reset button functionalities, and other physical interfaces.
- **First Use** – Provides step-by-step instructions for the initial setup and basic operation of the router.
- **Technical Specifications** – Lists key technical parameters, applicable standards and regulatory compliance information, results of type tests, cellular module specifications, and detailed interface parameters.

## 1.2 Product Introduction

The ICR-4272 router series represents the pinnacle of industrial routers, leveraging the full capabilities of **5G technology**. Specifically designed for the EMEA and NAM markets, these routers offer unparalleled data transfer speeds, minimal latency, and exceptional network reliability. The superior performance of these 5G routers provides significant advantages over their 4G/3G/2G predecessors, establishing them as the preferred solution for a broad spectrum of industrial applications.

Perhaps the most notable benefit of the 5G and the ICR-4272 router series is the dramatically reduced latency. This decrease in data transmission delay ensures real-time responsiveness, making these routers particularly suitable for applications necessitating immediate feedback or interaction. Industries benefit from smooth and instant communication, irrespective of geographic location, enabling precise and accurate monitoring and control of critical processes.

Featuring ultra-high-speed data transfer rates of up to **3.4 Gbps for downloads** and **900 Mbps for uploads**, this router is perfectly suited for demanding IoT applications in various industries, including industrial routers and gateways, digital signage, and industrial PCs and tablets.

Enhanced cellular network performance is achieved with **4x4 MIMO** technology, supplemented by support for dual **GNSS** antennas through shared SMA connectors with cellular antennas. Wi-Fi-equipped models offer **dual-band Wi-Fi 6/6E** capability, featuring **2x2 MU-MIMO** antennas, along with **Bluetooth V5.2** support.

Housed within a robust metal enclosure, the router is equipped with two **SIM card slots** to ensure cellular connection redundancy. It also boasts two **1Gb Ethernet ports**, a **USB 3.0** socket, dual switchable **RS232/RS485** interfaces, four **digital inputs**, and two **digital outputs** for comprehensive connectivity and control options. Additionally, a **microSD card** slot is available to expand storage capabilities.

The router features a **Low Power Mode** and a **hardware watchdog** for automated status monitoring and system restarts, supplemented by additional diagnostic functionalities to bolster overall reliability.

Router configuration is accessible through a **secure web interface**, offering detailed insights into the entire configuration, statuses, signal strength, and logs.

Basic features include **two-factor authentication**, **IPv6 Dual Stack**, **DHCP**, **NAT**, **NAT-T**, **DynDNS**, **DNS proxy**, **VLAN**, **QoS**, **NTP**, **VRRP**, **SMS control**, **port forwarding**, and **connection backup**, among others. The router supports various VPN protocols, including **IPSec**, **OpenVPN**, **GRE**, **L2TP**, and **PPTP**, ensuring secure communication.

The router allows for the insertion of **Linux scripts** for automated tasks. It supports the definition of up to **four distinct profiles**, switchable via the web interface, SMS, or digital input.

**Router Apps** enhance router functionality through custom software programs. For Advantech routers, a diverse array of Router Apps is offered, encompassing categories such as connectivity, routing, services, among others, freely accessible on the Advantech [Router Apps](#) webpage. Additionally, directly from the router web interface, you can use an **Advantech public server** for the Router App or router firmware installation/update.

Compatibility with Advantech's **remote device management** platform, [WebAccess/DMP](#), offers extensive device management and monitoring, ensuring that devices remain up-to-date and secure.

## 1.3 Hardware Overview

In this chapter, all components of the router case are described, including links to chapters that provide more details.



Figure 1: Router hardware overview – front view

| # | Item                         | Type           | Description                                                                                                                                                                                                                                                                          |
|---|------------------------------|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | GND Screw                    | M3             | Ensure proper grounding; refer to Chapter 2.5.                                                                                                                                                                                                                                       |
| 2 | LEDs                         | —              | Status LED indicators; see Chapter 2.11.                                                                                                                                                                                                                                             |
| 3 | RST                          | —              | Button to reboot the router or restore default settings; see Chapter 2.12.                                                                                                                                                                                                           |
| 4 | PWR                          | 2-pin terminal | Power supply socket; see Chapter 2.5.                                                                                                                                                                                                                                                |
| 5 | ETH0, ETH1                   | RJ45           | 1 Gb Ethernet LAN interfaces; see Chapter 2.4.                                                                                                                                                                                                                                       |
| 6 | USB                          | USB-A          | USB 3.0 host port; see Chapter 2.9.                                                                                                                                                                                                                                                  |
| 7 | Serial & I/O                 | 16-p term.     | Two switchable RS232/RS485, 4 digital inputs, and 2 digital outputs interfaces. See Chapter 2.8 for details, Chapter 3.8 for I/O parameters, and Chapter 3.9 for serial interface settings.                                                                                          |
| 8 | GNSS, ANT0, ANT1, ANT2, ANT3 | SMA female     | Cellular module and GNSS antenna connectors. Refer to Chapter 2.2 for details, Chapter 3.4 for cellular module parameters, and Chapter 3.5 for GNSS parameters.                                                                                                                      |
| 9 | WIFI                         | RP-SMA female  | Connectors for the Wi-Fi antennas. See Chapter 2.2 for more information and Chapter 3.6 for Wi-Fi parameters. The Wi-Fi connector located on the right-hand side can be used for a Bluetooth antenna; see Chapter 2.3 for more information and Chapter 3.7 for Bluetooth parameters. |

Table 1: Router hardware overview – front view



Figure 2: Router hardware overview – rear view

| #  | Item                      | Type                | Description                                                                              |
|----|---------------------------|---------------------|------------------------------------------------------------------------------------------|
| 10 | Wall Clips                | —                   | Wall mounting clips, included as standard accessories; see Chapter 1.9.                  |
| 11 | SIM Slots<br>microSD Slot | Mini SIM<br>microSD | Two Mini SIM card slots; details in Chapter 2.1.<br>microSD card slot; see Chapter 2.10. |
| 12 | DIN Clip                  | —                   | DIN mounting clips, included as standard accessories; see Chapter 1.10.                  |

Table 2: Router hardware overview – rear view

## 1.4 Order Codes

The table below provides an overview of the order codes.

| Order code        | Configuration                                                                                                                                                                                                            |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ICR-4272          | 5G NR / LTE (DL Cat 19 / UL Cat 18) cellular module, two Gb ETH, GNSS, USB 3.0, microSD card slot, two RS232/RS485 (switchable), four digital inputs, four digital outputs, two SIM readers                              |
| ICR-4272 <b>W</b> | 5G NR / LTE (DL Cat 19 / UL Cat 18) cellular module, two Gb ETH, GNSS, <b>dual-band Wi-Fi 6/6E</b> , USB 3.0, microSD card slot, two RS232/RS485 (switchable), four digital inputs, two digital outputs, two SIM readers |

Table 3: Order code overview

## 1.5 Product Revisions

For the product revision history of the entire product platform, refer to the table below. Please note that some revisions may not be available for certain order codes. The revision number is printed on both the packaging and product labels.

The router GUI can also display the product revision under *Status* → *General* → *System Information* → *Product Revision*. Please note that the default revision (Rev. 1.0) may not be available here.

| Rev.# | Description                                                                                 |
|-------|---------------------------------------------------------------------------------------------|
| 1.0   | Initial version (revision number not printed on the labels).                                |
| 1.1   | On the chassis: 7 SMA holes instead of 6; refer to <a href="#">PCN-2024-05</a> for details. |

Table 4: HW revision history

1.6 Package Contents

The standard set of the router includes the following items, as listed in the table below:

| Item# | Description                                                            | Figure                                                                               | Q'ty |
|-------|------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------|
| 1     | Router (includes wall clips and a DIN rail clip mounted on the router) |    | 1 pc |
| 2     | 2-pin terminal block for power supply (installed on the router)        |   | 1 pc |
| 3     | 16-pin terminal block (installed on the router)                        |   | 1 pc |
| 4     | Printed <i>Quick Start Guide Leaflet</i>                               |  | 1 pc |

Table 5: Package contents

## 1.7 Product Dimensions

For the dimensions of the router see the figures below. Note that all sizes are measured in millimeters.

### Wall Mount Clip Variant

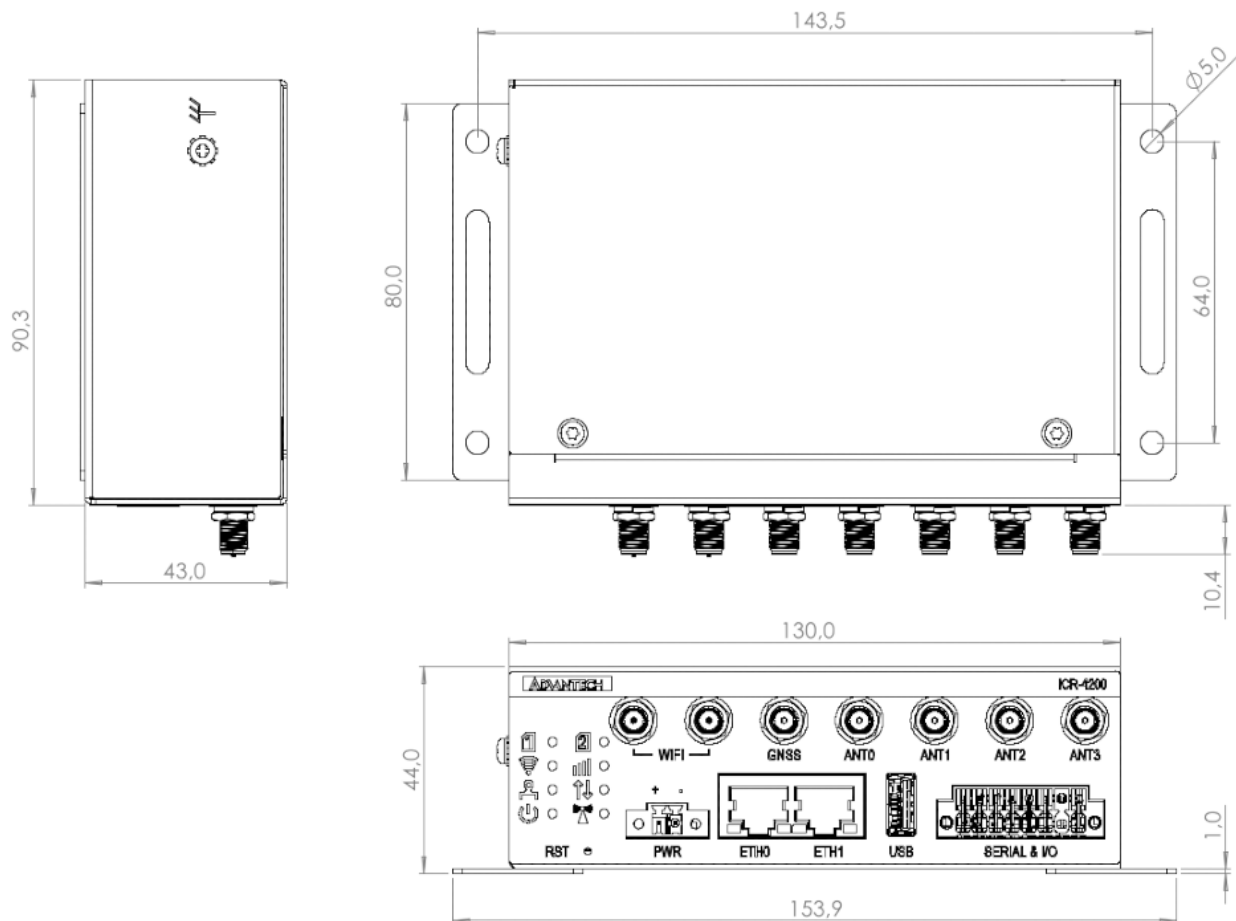


Figure 3: Router dimensions – front, top and right view with wall-mounting holder

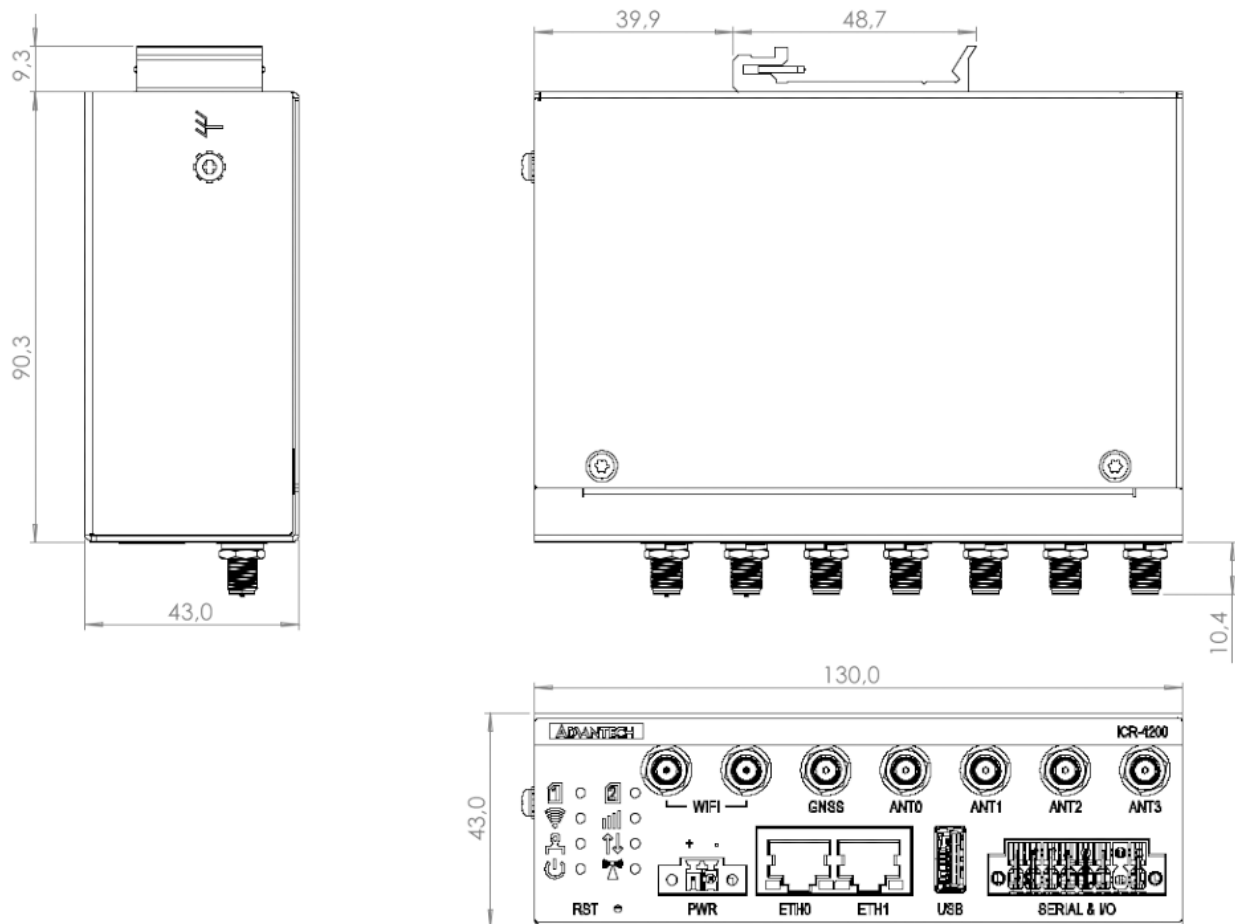
**Variant with DIN Rail Clip**

Figure 4: Router dimensions – front, top and right view with DIN rail clip

## 1.8 Mounting Recommendations

The router can be placed in the following ways:

- On a flat surface.
- On a wall using the wall-mounting clips (refer to Chapter 1.9).
- On a DIN rail EN 60715 with the metal DIN rail clip (refer to Chapter 1.10).

For most applications involving a built-in router within a switchboard, two types of environments are typically encountered:

- A non-public industrial environment with low voltage but high interference.
- A public environment with low voltage and without high interference.

For both of these environments, it's feasible to mount the router to a switchboard, eliminating the need for immunity examination or EMC-related issues as per EN 61439-1:2011 standards.

### Warning

To comply with the EN 61439-1:2011 specification, follow these assembly instructions when attaching a router to a switchboard:

- When using whip antennas, maintain a minimum distance of 6 cm from cables and metal surfaces on all sides to avoid interference. If an external antenna is used apart from the switchboard, a lightning conductor is necessary.
- When mounting a router on sheet steel, consider using a cable antenna.

For all cables, it's recommended to bundle them, following these guidelines:

- The combined length of the cable bundle (power supply and data cables) should not exceed 1.5 m. If data cable length surpasses 1.5 m or if the cable runs toward the switchboard, installing surge protectors is advisable.
- Data cables must not be bundled with mains voltage cables (230 V/50 Hz or 120 V/60 Hz).
- Ensure sufficient space is left between each connector for cable handling.
- For proper router functionality, use an earth-bonding distribution frame to ground the grounding screw (refer to Chapter 2.5).

## 1.9 Wall Mounting

### Info

The wall-mounting clips are included as a standard accessory with the router.

The router can be affixed to a wall or another surface using the wall-mounting clips. Two wall-mounting clips are pre-assembled to the router during production and need to be rotated as shown in Figure 5. Each clip features two holes with a diameter of 5 millimeters for screw placement. For precise mounting dimensions, refer to Figure 3 in Chapter 1.7.

### Warning

When attaching the wall-mounting clips, tighten the screws with a maximum torque of 0.4 Nm.

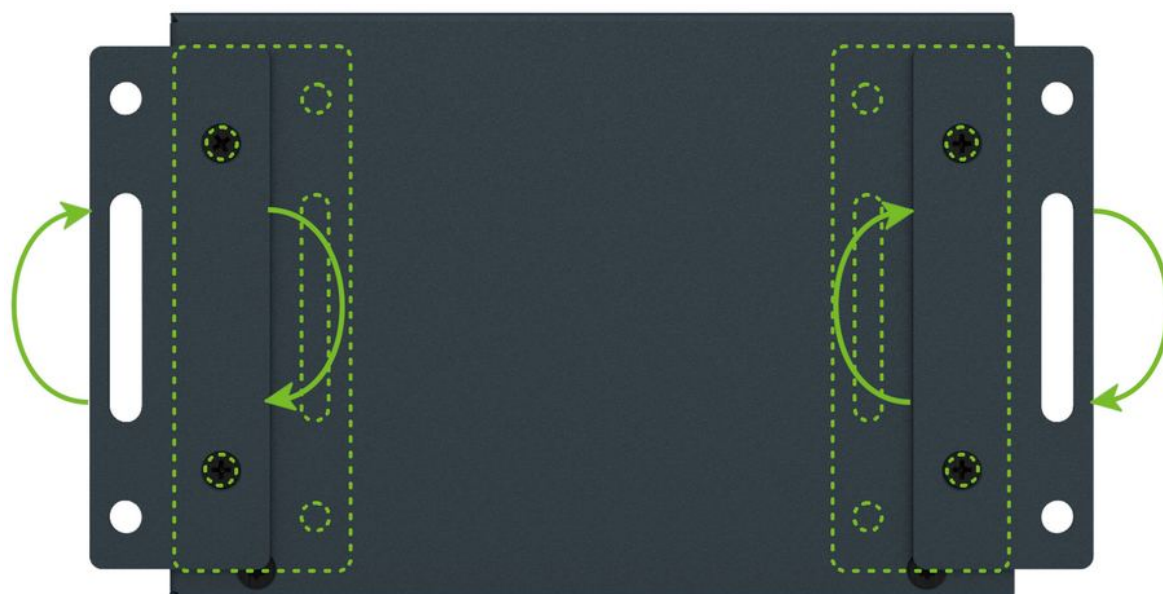


Figure 5: Rotated wall-mounting clips

## 1.10 DIN Rail Mounting

You can attach the DIN rail clip to the router for mounting it onto a DIN rail that complies with the 60715 standards. The default position of the clip is depicted in Figure 6. If necessary, the clip can also be rotated vertically.

### Warning

When attaching the clip, tighten the screws with a maximum torque of 0.4 Nm.

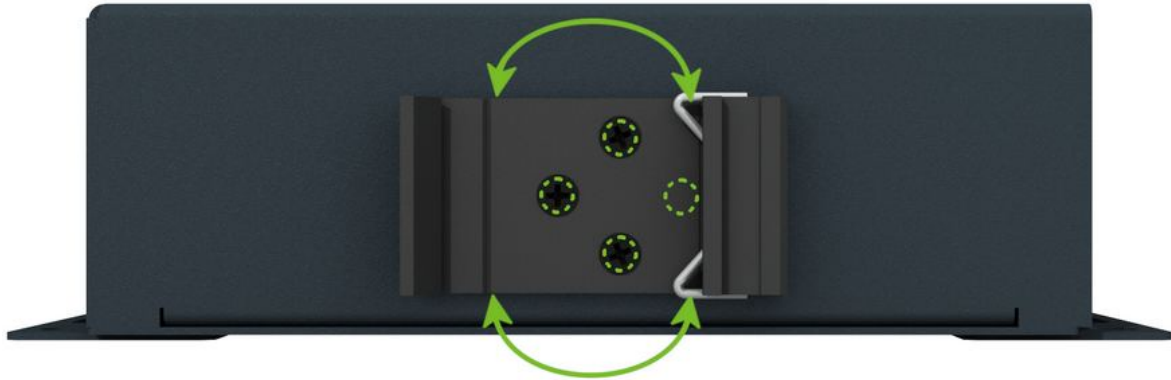


Figure 6: Default position of the DIN rail clip

To remove the router from the DIN rail, lightly push down on the router to disengage the bottom part of the DIN rail clip from the rail. Then, pivot the bottom part of the router away from the DIN rail, as demonstrated in Figure 7.

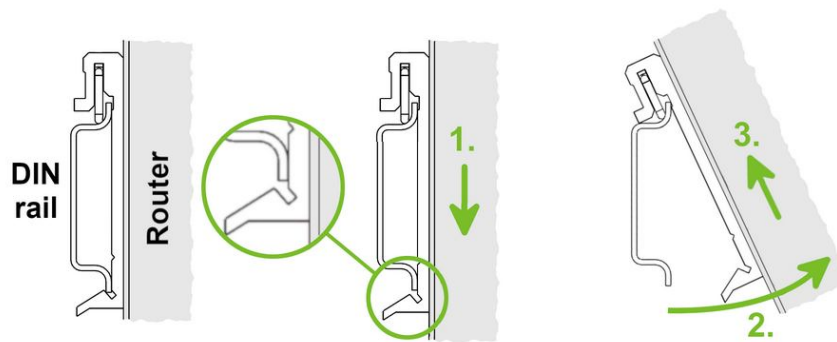


Figure 7: Removing router from the DIN rail

## 1.11 Product Label

The figure below shows an example of the product labels with all the information printed on them.



Figure 8: Product label

## 1.12 First Use

You can perform the initial configuration of the router using a web browser on your PC. This interface enables router monitoring, configuration, and administration.

### Warning

- 
- Before putting the router into operation, ensure that all components required for running your applications are connected. Refer to Chapter [1.3 Hardware Overview](#) for an overview of the hardware.
  - Do not operate the router without an antenna connected to the main antenna connector. Transmitted energy will be reflected by an open connector, which could potentially damage the equipment.
  - This device utilizes radio frequency bands that may be subject to specific usage restrictions in certain European Union countries (e.g., indoor use only). Please refer to [Appendix C](#) for detailed regulatory information before operation.

The procedure for connecting to a new router is described in the *Configuration Manual* [1], Chapter *Getting Started* → *Configuration Environments* → *Web Interface Initial Setup*. This manual also provides detailed descriptions and examples of router configuration using the web interface.

## 2. Hardware Functionality

See Chapter 1.3 for an overview of the product's hardware, along with links to chapters offering detailed explanations.

### 2.1 SIM Card Slots

Slots for two SIM cards are located on the router beneath a metal cover. If you plan to use this device for cellular network communication, insert an activated data-provisioned SIM card into the SIM card slot. You have the option to install two SIM cards simultaneously for utilizing the switching feature. The SIM cards can have different Access Point Names (APNs) configured. The procedure for changing SIM cards is outlined below. If the SIM requires a PIN, input it in the router's web interface (*Administration* → *Unlock SIM Card*).

#### Info

Type of SIM card: Mini SIM (2FF) 25.0 × 15.0 × 0.76 mm.

#### Warning

##### Inserting the SIM card:

- Always disconnect the router from the power supply before handling the SIM card.
- Unscrew the two screws on the SIM card cover and remove the cover.
- To remove an inserted SIM card, use the protrusion on the SIM card cover, as indicated in the figure below, to gently press the SIM card into its slot until you hear a click. Upon hearing the click, release the pressure on the card, and it will automatically pop out of its slot.
- To properly insert a SIM card, gently push the card into the designated slot until you hear a confirming click. For this task, you may utilize the protrusion on the SIM card cover, which is indicated in the figure below.
- Put the cover back and secure it with the two screws.



Figure 9: SIM card insertion

## 2.2 Antennas Interfaces

SMA female connectors (*ANT0*, *ANT1*, *ANT2*, and *ANT3*) are designated for connecting cellular antennas to the router. Refer to Table 20 for detailed module antenna mapping. If required, connect a GNSS antenna to the GNSS SMA female connector. Additionally, RP-SMA female connectors labeled *WIFI* are provided for connecting Wi-Fi antennas on models that support Wi-Fi.

### Warning

Always operate the router with a cellular antenna securely connected to the main antenna connector. Transmitting without an antenna attached will cause RF energy to be reflected at the open connector, which can lead to permanent damage to the radio circuitry. Ensure the antenna is properly installed before powering on or transmitting to prevent equipment failure.

### Info

Recommended tightening moment for screwing the antenna to the SMA connector is 0.9 Nm.

## 2.3 Bluetooth

The Wi-Fi connector, situated on the right-hand side of the device, is engineered for compatibility with Bluetooth antennas. For detailed information on the Bluetooth specifications supported by our router, please refer to Chapter 3.7. The integration of Bluetooth functionality within our router encompasses three principal components:

1. **Kernel Support and Drivers:** Integrated into the router's firmware, this includes kernel-level Bluetooth support and the necessary drivers to facilitate Bluetooth connectivity.
2. **Bluetooth Router App:** This application leverages the *BlueZ* Linux Bluetooth stack to extend the router's Bluetooth functionalities. It is not pre-installed on the router. For activation, the [Bluetooth Router App](#) must be downloaded and installed.
3. **Node-RED Applications:** To achieve advanced Bluetooth functionalities, Node-RED and its Bluetooth node can be employed. Similar to the Bluetooth Router App, [Node-RED](#) and the [Node-RED Bluetooth](#) node are available for installation.

## 2.4 Ethernet Interfaces

The RJ45 panel socket is used for one ETH0 and one ETH1 Ethernet interfaces. The pinout of the socket is shown in Figure 10 and described in Table 6.




Figure 10: Ethernet connector pinout (RJ45 socket)

| Pin | 10base-T & 100base-T | 1000base-T                     |
|-----|----------------------|--------------------------------|
| 1   | Tx+ (Transmit Data+) | BI_DA+ (BiDirectional pair A+) |
| 2   | Tx- (Transmit Data-) | BI_DA- (BiDirectional pair A-) |
| 3   | Rx+ (Receive Data+)  | BI_DB+ (BiDirectional pair B+) |
| 4   | —                    | BI_DC+ (BiDirectional pair C+) |
| 5   | —                    | BI_DC- (BiDirectional pair C-) |
| 6   | Rx- (Receive Data-)  | BI_DB- (BiDirectional pair B-) |
| 7   | —                    | BI_DD+ (BiDirectional pair D+) |
| 8   | —                    | BI_DD- (BiDirectional pair D-) |

Table 6: Ethernet connector pinout (RJ45 socket)

### Info

The isolation barrier of the Ethernet ports against the ground is 1500 V.

## 2.5 Power Supply

A two-pin terminal connector (pitch 3.5 mm) is utilized to power the router. The corresponding connector is included as a standard accessory with the router.

| Pin | Signal mark | Description                                         |
|-----|-------------|-----------------------------------------------------|
| 1   | VCC(+)      | Positive pole of DC supply voltage (+9 to +48 V DC) |
| 2   | GND(-)      | Negative pole of DC supply voltage                  |

Table 7: Power connector pinout

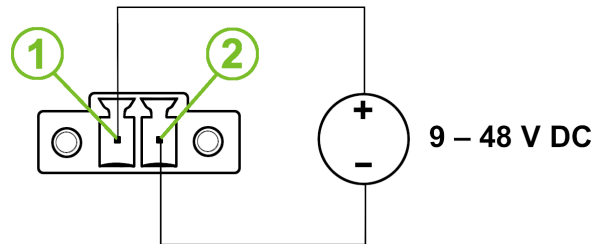


Figure 11: Power connector pinout

The required power supply voltage for the router ranges between +9 V and +48 V DC. Refer to the connection scheme in Figure 11 for proper setup. The router is equipped with built-in protection against reversed polarity, functioning without signaling. To guarantee correct operation, the power source must be capable of providing a sufficient amount of energy, as detailed in the consumption section of Chapter 3.1.

### Warning

- Grounding the router using the grounding screw eliminates the protection against reversed polarity. Ensure the negative pole of the DC power supply shares the same voltage reference as the grounding screw. A voltage difference between these points may damage the router, necessitating repairs exclusively by an authorized service center.
- Unit has to be supplied by a power supply specified as a Limited Power Source (LPS) or CEC/NEC Class 2 source of supply.

All metal parts, including the box, are interconnected with the negative pole of the power supply (common pole). If recommended for the installation environment, protect the router by properly grounding it using the grounding screw, as depicted in Figure 12. The maximum tightening torque for the grounding screw is 1 Nm.

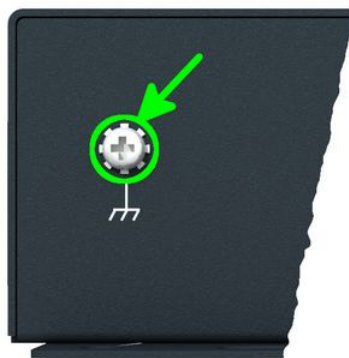


Figure 12: Grounding screw position

## 2.6 Low Power Mode

### Warning

In applications requiring low power consumption, such as solar power (not 24/7 mode), it is strongly recommended to use the Low Power Mode (LPM) before shutting down the entire router.

LPM (Low Power Mode) is a router mode in which the router enters a sleep state with minimal power consumption; you can find details about LPM power consumption in Chapter 3.1. The router can be awakened from this mode either by applying a signal to the BIN1 input or after a predefined period of time. To put the router into LPM mode, you can use the `lpm` command; for more information, refer to the [Command Line Interface](#) application note.

## 2.7 I/O Port Interfaces

The pins of I/O interface are physically connected to the 16-pin terminal block panel socket. The pinout of the I/O interface is described in Figure 13 and Table 8.

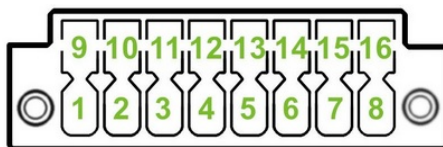


Figure 13: I/O connector pinout

| Pin   | Signal mark | Description                   |
|-------|-------------|-------------------------------|
| 14    | BIN0        | The first digital input       |
| 6     | BIN1        | The second digital input      |
| 15    | BIN2        | The third digital input       |
| 7     | BIN3        | The fourth digital input      |
| 16    | BOUT0       | The first digital output      |
| 8     | BOUT1       | The second digital output     |
| 5, 13 | GND         | Ground (common negative pole) |

Table 8: I/O ports pinout

### Info

The I/O interface is not electrically isolated from the router.

The I/O user interface is designed for digital input processing and digital output control. For detailed electrical parameters see Chapter 3.8. The functional scheme of connection for the digital input and digital output is in Figure 14.

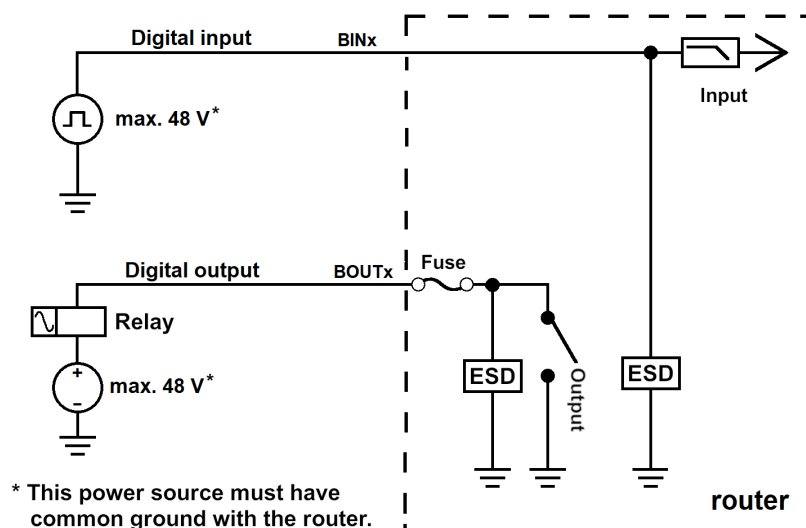


Figure 14: Functional block diagram of the digital interface

2.8 Serial Interfaces



Warning

For device protection, the serial interface can only be switched when the router is powered off.

Two independently switchable serial interfaces are connected to the 16-pin terminal block panel socket. Both interfaces can be independently switched to the RS232 or RS485 serial interfaces by the DIP switch located **beneath a metal SIM cover**.

If a switch is switched to the upper position, the corresponding serial interface is switched to operate as RS232; see Figure 15, Table 9, and Table 10.

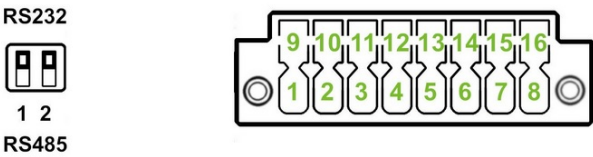


Figure 15: Both interfaces in RS232 mode

| Pin | Signal mark | Description     |
|-----|-------------|-----------------|
| 1   | RXD         | Received Data   |
| 2   | TXD         | Transmit Data   |
| 3   | RTS         | Request to Send |
| 4   | CTS         | Clear to Send   |
| 5   | GND         | Ground          |

Table 9: First serial interface – RS232 mode

| Pin | Signal mark | Description     |
|-----|-------------|-----------------|
| 9   | RXD         | Received Data   |
| 10  | TXD         | Transmit Data   |
| 11  | RTS         | Request to Send |
| 12  | CTS         | Clear to Send   |
| 13  | GND         | Ground          |

Table 10: Second serial interface – RS232 mode

If the DIP switch is switched to the down position, the corresponding serial interface is configured to operate as RS485; refer to Figure 16, Table 11, and Table 12.

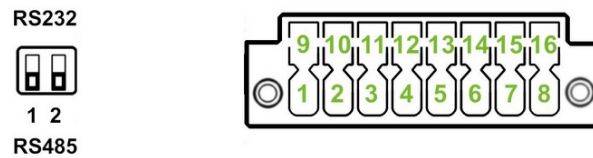


Figure 16: Both interfaces in RS485 mode

| Pin | Signal mark | Description |
|-----|-------------|-------------|
| 2   | D (+)       | In/Out      |
| 1   | D (-)       | In/Out      |
| 5   | GND         | Ground      |

Table 11: First serial interface – RS485 mode

| Pin | Signal mark | Description |
|-----|-------------|-------------|
| 10  | D (+)       | In/Out      |
| 9   | D (-)       | In/Out      |
| 13  | GND         | Ground      |

Table 12: Second serial interface – RS485 mode

#### Info

The serial interfaces are not electrically isolated from the router.

## 2.9 USB 3.0 Port

The router is equipped with a single USB 3.0 host port featuring a USB-A type socket. The pinout details of the USB socket are illustrated in Figure 17 and further described in Table 13.




Figure 17: USB 3.0 connector pinout

| Pin 1 | Signal Mark | Description                                |
|-------|-------------|--------------------------------------------|
| 1     | VBUS        | 5 V DC Power, 0.5 A                        |
| 2     | D-          | USB 2.0 differential pair -                |
| 3     | D+          | USB 2.0 differential pair +                |
| 4     | GND         | Ground for power return                    |
| 5     | StdA_SSRX-  | SuperSpeed receiver differential pair -    |
| 6     | StdA_SSRX+  | SuperSpeed receiver differential pair +    |
| 7     | GND_DRAIN   | Ground for signal return                   |
| 8     | StdA_SSTX-  | SuperSpeed transmitter differential pair - |
| 9     | StdA_SSTX+  | SuperSpeed transmitter differential pair + |

Table 13: USB 3.0 connector pinout description

For detailed USB port configuration options, refer to the configuration manual [\[1\]](#), Chapter *Configuration* → *USB Port*.

## 2.10 microSD Card Reader

The microSD card reader is located under the SIM cover on the router. This card reader enables the router to utilize microSD memory cards. The technical specifications are presented in table below.

|                                    |              |                                     |
|------------------------------------|--------------|-------------------------------------|
| Supported technologies             |              | SD, SDHC, SDXC                      |
| Supported capacity                 | SDHC<br>SDXC | up to 32 GB<br>from 32 GB to 512 GB |
| Supported microSD card filesystems |              | vfat, ext2, ext3, ext4              |

Table 14: microSD card technical specifications

### Warning

#### Inserting the microSD card:

- To remove an inserted microSD card, use the protrusion on the SIM card cover, as indicated in the figure below. Press the card slightly into its slot until you hear a click. Release the card, and it will pop out of its slot.
- To insert a microSD card, push the card into the slot with the correct orientation as shown in the picture until it clicks into place. For this task, you may utilize the protrusion on the SIM card cover again.



Figure 18: microSD card insertion

## Mounting microSD Card to the System

To access the microSD card within the router's system, it must be mounted. Follow these steps to mount the card:

- Use the `dmesg` command to view the list of recently connected devices.
- Identify the entry for the microSD card in the command's output, for example:  
`mmcblk0: p1`
- To mount the card to the `/mnt` directory, use the `mount` command:  
`mount /dev/mmcblk0p1 /mnt`

### Info

For more information about the commands for creating, mounting, checking, and unmounting a file system on a microSD card, refer to the application note for the [Ext4 Filesystem Utilities](#) router app.

## 2.11 LED Status Indication

There are status LEDs on the top side of the router to provide router status information. Moreover, ETH0 and ETH1 connectors, located on the front panel, have two additional LEDs providing information about the port status.

|                                                                                     | Caption      | Color                            | State                                          | Description                                                                                                                         |
|-------------------------------------------------------------------------------------|--------------|----------------------------------|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
|    | SIM1         | Green<br>Red                     | On<br>Fast blinking                            | SIM1 is active for the cellular connection.<br>A SIM1 issue (missing card or PIN not entered).                                      |
|    | SIM2         | Green<br>Red                     | On<br>Fast blinking                            | SIM2 is active for the cellular connection.<br>A SIM2 issue (missing card or PIN not entered).                                      |
|    | Wi-Fi        | Green<br>Green<br>Green<br>Green | On<br>Brief off blinks<br>Fast blinking<br>Off | AP or STA started successfully.<br>Data transmission.<br>AP or STA error (configuration, HW or connection).<br>AP and STA disabled. |
|    | SIG          | Green<br>Orange<br>Red           | On<br>On<br>On                                 | Good cellular signal.<br>Fair cellular signal.<br>Poor cellular signal.                                                             |
|   | USR          | Green                            | —                                              | The function of this LED is user-defined.                                                                                           |
|   | DAT          | Green                            | Blinking                                       | Cellular communication is in progress.                                                                                              |
|  | PWR          | Green<br>Green<br>Green          | On<br>Blinking<br>Fast blinking                | The router is booting up.<br>The router booted up and is ready.<br>The router firmware is being updated.                            |
|  | TECH         | Green<br>Orange<br>Red           | On<br>On<br>On                                 | The active SIM uses 5G technology.<br>The active SIM uses 4G technology.<br>The active SIM uses 3G technology.                      |
|  | ETH0<br>ETH1 | Green<br>Green                   | On<br>Off                                      | Selected 1 Gbps bit rate.<br>Selected 100/10 Mbps bit rate.                                                                         |
|  | ETH0<br>ETH1 | Yellow<br>Yellow<br>Yellow       | On<br>Brief off blinks<br>Off                  | The network cable is connected.<br>Data transmission.<br>The network cable is not connected.                                        |

Table 15: LED status indication

## 2.12 Reset Functions

The *RST* button has multiple functions. For more details, refer to the configuration manual [1], Chapter *Introduction* → *Device* → *Reset*.

### Info

Use a narrow screwdriver or a small tool to press the *RST* button.

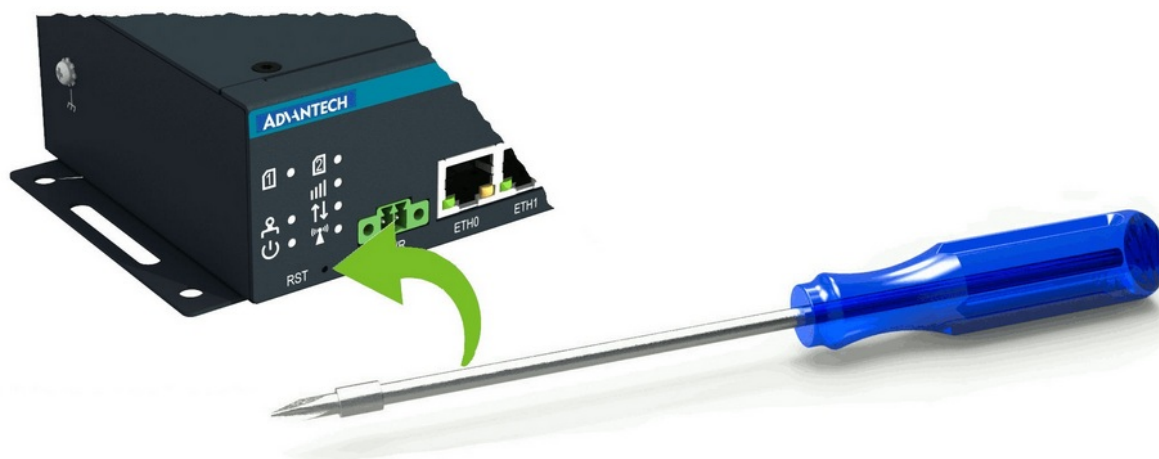


Figure 19: Resetting the router

## 3. Technical Parameters

### 3.1 Basic Technical Parameters

| Parameter                                 | Conditions                             | Description                                                                              |
|-------------------------------------------|----------------------------------------|------------------------------------------------------------------------------------------|
| Temperature range                         | Operating<br>Storage                   | -40 °C to +75 °C (-40 °F to +167 °F)<br>-40 °C to +85 °C (-40 °F to +185 °F)             |
| Humidity                                  | Operating<br>Storage                   | 5 to 95 % relative humidity non condensing<br>5 to 95 % relative humidity non condensing |
| Altitude                                  | Operating                              | 2000 m / 70 kPa                                                                          |
| Degree of protection                      |                                        | IP30                                                                                     |
| Supply voltage                            |                                        | 9 – 48 V DC                                                                              |
| Battery for RTC                           |                                        | CR1225                                                                                   |
| Consumption for non-Wi-Fi / Wi-Fi version | Idle<br>Average<br>Maximum<br>LPM mode | 3.5 W / 4.5 W<br>4.1 W / 5.2 W<br>9.4 W / 13.0 W<br>14 mW                                |
| Dimensions of device (w/o clips)          |                                        | 130 × 90 × 43 mm (5.12" × 3.54" × 1.39")                                                 |
| DIN rail clip specification               |                                        | DIN 35 mm, EN 60715                                                                      |
| Total weight for non-Wi-Fi / Wi-Fi        |                                        | 515 g (1.14 lbs) / 530 g (1.17 lbs)                                                      |

Table 16: Basic technical parameters

## 3.2 Standards and Regulations

| Parameter         | Description                                                                                                                                                                                                                            |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Radio             | ETSI EN 301 908-1, ETSI EN 301 908-2, ETSI EN 301 908-13, ETSI EN 301 908-25, ETSI EN 303 413, ETSI EN 300 328, ETSI EN 301 893, ETSI EN 303 687, FCC part 22H, FCC part 24E, FCC part 27, FCC part 90, FCC part 96, PTCRB             |
| EMC               | ETSI EN 301 489-1, ETSI EN 301 489-17, ETSI EN 301 489-19, ETSI EN 301 489-52, EN 610000-6-2, EN 610000-6-3, EN 55032, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, FCC part 15.B, FCC part 15C, FCC part 15E |
| Safety            | EN IEC 62368-1, EN IEC 62311, IEEE 802.3                                                                                                                                                                                               |
| Carrier approvals | AT&T, T-mobile <sup>1</sup> , Verizon <sup>1</sup>                                                                                                                                                                                     |
| Mechanical        | EN 60529, EN 60068-2-27, EN 60068-2-64                                                                                                                                                                                                 |
| Climatic          | EN 60068-2-2, EN 60068-2-1, EN 60068-2-14, EN 60068-2-78, NEMA TS2                                                                                                                                                                     |
| Transportation    | E-Mark (E8), homologation number: 10R - 06 14947                                                                                                                                                                                       |
| Cybersecurity     | EN 18031-1                                                                                                                                                                                                                             |
| National          | CE, UKCA, FCC, IC compliant                                                                                                                                                                                                            |
| Environmental     | REACH, RoHS3 and WEEE compliant                                                                                                                                                                                                        |

Table 17: Standards and regulations

<sup>1</sup>Certification is issued for a specific project only.

### 3.3 Type Testing and Environmental Conditions

| Phenomena                                    | Test                                       | Description                                             | Test levels                                                            |
|----------------------------------------------|--------------------------------------------|---------------------------------------------------------|------------------------------------------------------------------------|
| ESD                                          | EN 61000-4-2                               | Enclosure contact                                       | ± 6 kV (crit. A)                                                       |
| RF field AM modulated                        | EN 61000-4-3                               | Enclosure                                               | 20 V/m (crit. A)<br>(80 – 1000 MHz)<br>10 V/m (crit. A)<br>(1 – 6 GHz) |
| Fast transient                               | EN 61000-4-4                               | Signal ports<br>Power ports<br>Ethernet ports           | ± 1 kV (crit. A)<br>± 2 kV (crit. A)<br>± 1 kV (crit. A)               |
| Surge                                        | EN 61000-4-5                               | Ethernet ports<br>Power ports                           | ± 1 kV (crit. A), shielded cab.<br>± 1 kV (crit. A)                    |
| RF conducted                                 | EN 61000-4-6                               | All ports                                               | 10 V/m (crit. A)<br>(0.15 – 80 MHz)                                    |
| Radiated emission                            | EN 55032                                   | Enclosure                                               | Class B                                                                |
| Conducted emission                           | EN 55032                                   | Signal ports<br>Power ports<br>Ethernet ports           | Class B<br>Class B<br>Class B                                          |
| Dry heat                                     | EN 60068-2-2                               | Test Bb, storage +85 °C, operation +75 °C               |                                                                        |
| Cold                                         | EN 60068-2-1                               | Test Ab, storage -40 °C, operation -40 °C               |                                                                        |
| Damp heat                                    | EN 60068-2-78                              | 95 % rel. humidity (+40 °C)                             |                                                                        |
| Dry heat, cyclic                             | EN 60068-2-30                              | +55 °C / +25 °C, rel. humidity 95 %, 12 h - 12 h        |                                                                        |
| Dry heat                                     | EN 60068-2-2                               | Test Bb, storage +85 °C, operation +75 °C               |                                                                        |
| Thermal shock/ temp. variation               | EN 60068-2-14                              | Test Nb, -40 °C/+75 °C, 3h/3h, 2 cycles, 3 K/min        |                                                                        |
| Degrees of protection provided by enclosures | EN 60529                                   | IP30                                                    |                                                                        |
| Vibration, broadband random                  | EN 60068-2-64                              | Spectrum A.3 cat 1, breakpoints A.6 cat 1               |                                                                        |
| Shock                                        | EN 60068-2-27                              | 50 m/s <sup>2</sup> , 11 ms, half sine, 10 in each dir. |                                                                        |
| Low Temperature                              | NEMA TS2<br>chap. 2.1.5.1                  | storage -45 °C (-49 °F)                                 |                                                                        |
| High Temperature                             | NEMA TS2<br>chap. 2.1.5.1                  | storage +85 °C (185 °F)                                 |                                                                        |
| Low Temperature                              | NEMA TS2<br>chap. 2.2.7.3<br>chap. 2.2.7.4 | operation -34 °C (-30 °F)                               |                                                                        |
| High Temperature                             | NEMA TS2<br>chap. 2.2.7.5<br>chap. 2.2.7.6 | operation +74 °C (165 °F)                               |                                                                        |

Table 18: Type testing and environmental conditions

### 3.4 Parameters of Cellular Module

| SMA             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Antenna         | <ul style="list-style-type: none"> <li>Connector type: SMA (4 pcs), input impedance: 50 <math>\Omega</math></li> <li>5G sub-6 FDD and TDD, SA and NSA operations</li> <li>4G 7xCA up to 20 layers DL/ 2xCA UL, 256-QAM DL/UL</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 5G parameters   | <ul style="list-style-type: none"> <li>5G sub-6 FDD and TDD, SA and NSA operations</li> <li>UL 2 x 2 MIMO: n38, n41, n48, n77, n78, n79</li> <li>DL 4 x 4 MIMO 5G NR SA: n1, n2, n3, n7, n25, n30, n38, n40, n41, n48, n66, n70, n77, n78, n79</li> <li>DL 4 x 4 MIMO 5G NR NSA: n1, n2, n3, n7, n25, n30, n66, n38, n40, n41, n48, n70, n77, n78, n79</li> <li>Supported 5G NR SA &amp; NSA bands: n1 (2100), n2 (1900 PCS), n3 (1800), n5 (850), n7 (2600), n8 (900), n12 (700 a), n13 (700 c), n14 (700 PS), n18 (800 Lower), n20 (800), n25 (1900+), n26 (850+), n28 (700 APT), n29 (700 d), n30 (2300 WCS), n38 (TD 2600), n40 (TD 2300), n41 (TD 2600+), n48 (TD 3600), n66 (AWS), n70 (AWS-4), n71 (600), n75 (DL 1500+), n76 (DL 1500-), n77 (TD 3700), n78 (TD 3500), n79 (TD 4700)</li> <li>NSA TDD: max. 3.4 Gbps(DL), max. 550 Mbps (UL)</li> <li>SA TDD: max. 2.5 Gbps(DL), max. 900 Mbps (UL)</li> <li>Max. output power: <ul style="list-style-type: none"> <li>NR bands: 23 dBm (Class 3)</li> <li>NR HPUE bands (n41): 26 dBm (Class 2)</li> <li>NR n-bands (n41, n77, n78 and n79): 29 dBm (Class 1.5)</li> </ul> </li> </ul> |
| LTE parameters  | <ul style="list-style-type: none"> <li>3GPP Release 16 (Cat 20)</li> <li>Supported modulations: QPSK and 256QAM (uplink/downlink)</li> <li>4 x 4 MIMO downlink for B1, B2, B3, B4, B7, B25, B30, B38, B40, B41, B42, B43, B48, B66</li> <li>Supported FDD bands: B1 (2100), B2 (1900 PCS), B3 (1800+), B4 (AWS-1), B5 (850), B7 (2600), B8 (900 GSM), B12 (700 a), B13 (700 c), B14 (700 PS), B17 (700 b), B18 (800 Lower), B19 (800 Upper), B20 (800 DD), B25 (1900+), B26 (850+), B28 (700 APT), B29 (700 d), B30 (2300 WCS), B32 (1500 L-band), B66 (AWS), B71 (600), B106 (900)<sup>1</sup></li> <li>Supported TDD bands: B34 (TD 2000), B38 (TD 2600), B39 (TD 1900+), B40 (TD 2300), B41 (TD 2500+), B42 (TD 3500), B43 (TD 3700), B46 (TD Unlicensed), B48 (TD 3600)</li> <li>Bandwidth: 1.4, 3, 5, 10, 15 and 20 MHz RF bandwidth</li> <li>Bit rates: max. 2.0 Gbps (DL), max. 211 Mbps (UL)</li> <li>Max. output power: <ul style="list-style-type: none"> <li>LTE bands: 23 dBm (Class 3)</li> <li>LTE HPUE (for single carrier) bands (B41): 26 dBm (Class 2)</li> </ul> </li> </ul>                                                 |
| UMTS parameters | <ul style="list-style-type: none"> <li>3GPP Release 9, DC-HSDPA, HSPA+, HSDPA, HSUPA and WCDMA</li> <li>Supported modulations: QPSK and 256QAM</li> <li>Supported bands: B19 (800 MHz), B5 (850 MHz), B8 (900 MHz), B4 (AWS A-F 1700 MHz), B2 (PCS A-F 1900 MHz), B1 (2100 MHz)</li> <li>DC-HSDPA: max. 42 Mbps (DL)</li> <li>HSUPA: max. 5.76 Mbps (DL)</li> <li>WCDMA: 384 kbps (DL) / 384 kbps (UL)</li> <li>Max. output power: 24 dBm + 1/-3 dB (Class 3)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

Table 19: Technical parameters of cellular module

<sup>1</sup>Disabled by default. To enable this band, use the [Band Select](#) Router App.

### 3.4.1 Antenna Mapping

| SMA  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ANT0 | <p>Antenna 0 interface:</p> <p>5G NR:</p> <ul style="list-style-type: none"> <li>Tx: n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n30, n38, n40, n41, n66, n71</li> <li>Rx: n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29(SDL), n30, n38, n40, n41, n48, n66, n71, n75(SDL), n76(SDL), n77, n78, n79</li> </ul> <p>LTE:</p> <ul style="list-style-type: none"> <li>Tx: B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B30, B34, B38, B39, B40, B41, B66, B71</li> <li>Rx: B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29(SDL), B30, B32(SDL), B34, B38, B39, B40, B41, B42, B43, B46(SDL), B48, B66, B71</li> </ul> <p>WCDMA:</p> <ul style="list-style-type: none"> <li>Tx/Rx: B1, B2, B4, B5, B6, B8, B19</li> </ul> |
| ANT1 | <p>Antenna 1 interface:</p> <p>5G NR:</p> <ul style="list-style-type: none"> <li>Tx: n48, n77, n78, n79</li> <li>Rx: n1, n2, n3, n7, n25, n30, n38, n40, n41, n48, n66, n75(SDL), n76(SDL), n77, n78, n79</li> </ul> <p>LTE:</p> <ul style="list-style-type: none"> <li>Rx: B1, B2, B3, B4, B7, B25, B30, B32(SDL), B34, B38, B39, B40, B41, B42, B43, B48, B66</li> </ul> <p>GNSS:</p> <ul style="list-style-type: none"> <li>GPS L1, Galileo E1, Beidou B1, Glonass G1</li> </ul>                                                                                                                                                                                                                                                                                                                                               |
| ANT2 | <p>Antenna 2 interface:</p> <p>5G NR:</p> <ul style="list-style-type: none"> <li>Tx: n38, n41</li> <li>Rx: n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29(SDL), n30, n38, n40, n41, n48, n66, n71, n75(SDL), n76(SDL), n77, n78, n79</li> </ul> <p>LTE:</p> <ul style="list-style-type: none"> <li>Rx: B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29(SDL), B30, B32(SDL), B34, B38, B39, B40, B41, B42, B43, B46(SDL), B48, B66, B71</li> </ul> <p>WCDMA:</p> <ul style="list-style-type: none"> <li>Rx: B1, B2, B4, B5, B6, B8, B19</li> </ul>                                                                                                                                                                                                                          |
| ANT3 | <p>Antenna 3 interface:</p> <p>5G NR:</p> <ul style="list-style-type: none"> <li>Tx: n48, n77, n78, n79</li> <li>Rx: n1, n2, n3, n7, n25, n30, n38, n40, n41, n48, n66, n75(SDL), n76(SDL), n77, n78, n79</li> </ul> <p>LTE:</p> <ul style="list-style-type: none"> <li>Tx: B42, B43, B48</li> <li>Rx: B1, B2, B3, B4, B7, B25, B30, B32(SDL), B34, B38, B39, B40, B41, B42, B43, B48, B66</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                             |
| GNSS | <p>Antenna GNSS interface:</p> <p>GNSS:</p> <ul style="list-style-type: none"> <li>GPS L1, Galileo E1, Beidou B1, Glonass G1</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

Table 20: Cellular module antenna mapping

### 3.5 Parameters of GNSS

| Parameter                         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GNSS Systems                      | <p>GPS, Galileo, GLONASS, BeiDou, and QZSS.<br/>GPS is permanently enabled and cannot be turned off. Most combinations are supported.</p> <p><b>Unsupported combinations:</b></p> <ul style="list-style-type: none"> <li>• GPS + BeiDou</li> <li>• GPS + QZSS</li> <li>• GPS + BeiDou + QZSS</li> <li>• GPS + Galileo + QZSS</li> <li>• GPS + Galileo + BeiDou + QZSS</li> <li>• GPS + Galileo + GLONASS + QZSS</li> </ul>                                         |
| Antenna                           | <p>Connector type: SMA<br/>Input impedance: 50 <math>\Omega</math><br/>Antenna connection:<br/> <ul style="list-style-type: none"> <li>• GNSS active antenna SMA connector for L1 band</li> </ul> Frequency range:<br/> <ul style="list-style-type: none"> <li>• L1: 1559–1606 MHz</li> </ul> Polarization: RHCP or linear<br/> VSWR: <math>\leq 2:1</math><br/> Power mode: Active or passive antenna<br/> Passive antenna gain: 1.5 dBi &lt; Gain &lt; 3 dBi</p> |
| Features                          | <p>Protocol: NMEA 0183<br/>Data update rate: 1 Hz</p>                                                                                                                                                                                                                                                                                                                                                                                                              |
| Frequency                         | <p>GPS (L1): 2.046 MHz BW NB (centered on 1575.42 MHz)<br/> Galileo (E1): 4.092 MHz BW (centered on 1575.42 MHz)<br/> GLONASS: 8.3 MHz BW (1597.05–1606 MHz)<br/> BDS: 4.092 MHz BW (1559.05–1563.14 MHz)</p>                                                                                                                                                                                                                                                      |
| Sensitivity<br>(Autonomous)       | <p>Acquisition: -148 dBm<br/> Cold start: -146 dBm<br/> Tracking: -161 dBm</p>                                                                                                                                                                                                                                                                                                                                                                                     |
| TTFF<br>(Autonomous)              | <p>Cold start: 28 s<br/> Warm start: 27 s<br/> Hot start: 1 s</p>                                                                                                                                                                                                                                                                                                                                                                                                  |
| Accuracy (CEP-50)<br>(Autonomous) | <p>2 m (at open sky)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                           |

Table 21: Technical parameters of GNSS

### 3.6 Parameters of Wi-Fi

#### Warning

The 5 GHz and 6 GHz Wi-Fi interfaces operate in frequency bands that may be restricted to **indoor use only** in certain EU member states (for example, 5150–5350 MHz in the 5 GHz band). Please refer to [Appendix C](#) for detailed regulatory information.

| Parameter                        | Description                                                                                                                                                                                                                                                                                            |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Short Description                | Wi-Fi 6/6E 2x2 MU-MIMO                                                                                                                                                                                                                                                                                 |
| Supported Standards              | IEEE 802.11ax/ac/a/b/g/n (2T2R)<br>DBDC (Dual-band, Dual-concurrent)                                                                                                                                                                                                                                   |
| Antenna Connectors               | 2x2 MU-MIMO                                                                                                                                                                                                                                                                                            |
| Access Point                     | up to 15 clients                                                                                                                                                                                                                                                                                       |
| Data Rate                        | up to 450 Mbps @ 2.4 GHz<br>up to 950 Mbps @ 5 GHz<br>up to 950 Mbps @ 6 GHz<br>802.11b: up to 11 Mbps<br>802.11a/g: up to 54 Mbps<br>802.11n: MCS0 15<br>802.11ac: MCS0 9<br>802.11ax: MCS0 13                                                                                                        |
| Frequency Ranges                 | 2.412 – 2.484 GHz<br>5.150 – 5.850 GHz<br>5.925 – 7.125 GHz                                                                                                                                                                                                                                            |
| Spectrum Widths                  | 20/40 MHz @ 2.4 GHz<br>20/40/80/160 MHz @ 5/6 GHz                                                                                                                                                                                                                                                      |
| Modulation                       | 802.11b: DSSS (DBPSK, DQPSK, CCK)<br>802.11g: OFDM (BPSK, QPSK, 16-QAM, 64-QAM)<br>802.11n: OFDM (BPSK, QPSK, 16-QAM, 64-QAM)<br>802.11a: OFDM (BPSK, QPSK, 16-QAM, 64-QAM)<br>802.11ac: OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)<br>802.11ax: OFDMA (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM) |
| Type of Device                   | Access point (AP)<br>Station (STA)<br>Multi-role (AP & STA)                                                                                                                                                                                                                                            |
| Security – Standards             | WPA, WPA2, WPA3, 802.1X                                                                                                                                                                                                                                                                                |
| Security – Encryption            | WEP, TKIP, AES                                                                                                                                                                                                                                                                                         |
| TX Power (2 chains) <sup>1</sup> | max. 20 dBm @ 2.4 GHz<br>max. 18 dBm @ 5 GHz<br>max. 16 dBm @ 6 GHz                                                                                                                                                                                                                                    |

Table 22: Technical parameters of Wi-Fi

<sup>1</sup>The maximum transmit power is determined by the *Country* setting in the router's GUI; for more details, please refer to the *Configuration Manual*.

### 3.7 Parameters of Bluetooth

| Item                | Description                                                      |
|---------------------|------------------------------------------------------------------|
| Bluetooth Standards | V5.2, V5.1, V5.0, V4.2, V4.1, V4.0LE, V3.0, V2.1+EDR             |
| Antenna             | Shared with right RP-SMA connector                               |
| Frequency Range     | 2.412GHz 2.484GHz                                                |
| Data Rate           | 1 Mbps, 2 Mbps and Up to 3 Mbps                                  |
| Modulation          | Header: GFSK<br>Payload 2M: $\pi/4$ -DQPSK<br>Payload 3M: 8-DPSK |
| Receive Sensitivity | <0.1 % BR, BER at -70 dBm                                        |
| Output Power        | $\leq +14$ dBm                                                   |

Table 23: Technical parameters of Bluetooth

### 3.8 Parameters of I/O Ports

Electrical characteristics of the digital input are in Table 24. Status of the digital input can be retrieved in the router's web interface (on the *General Status* page) or by the `status ports` and `io get` commands, see [Command Line Interface](#) application note.

| Logical <sup>1</sup> | Voltage | Current | Status <sup>2</sup> |
|----------------------|---------|---------|---------------------|
| 1                    | 3 V     | 0.5 mA  | Off                 |
| 0                    | 5 V     | 0.8 mA  | On                  |
| 0                    | 12 V    | 1.6 mA  | On                  |
| 0                    | 48 V    | 3.4 mA  | On                  |

Table 24: Technical parameters of digital input

The maximum digital output load is **500 mA** at **48 V**.

<sup>1</sup>The digital status returned by the `io get` shell command.

<sup>2</sup>The digital status returned by the `status ports` shell command and displayed on the *General Status* page.

### 3.9 Parameters of Serial Interfaces

Supported parameters of the RS232 and RS485 interfaces, which can be configured in *Expansion Port 1* resp. *Expansion Port 2* menu items, are in Table 25.

| Parameter    | Description                                                            |
|--------------|------------------------------------------------------------------------|
| Baudrate     | 300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200, 230400. |
| Data Bits    | 5, 6, 7, 8.                                                            |
| Parity       | none, even, odd.                                                       |
| Stop Bits    | 1, 2.                                                                  |
| Flow Control | none, hardware.                                                        |

Table 25: Technical parameters of serial interfaces

### 3.10 System Configuration

The main parameters of the system are listed in Table 26.

| Parameter        | Description                                                                                                                                                                                                                     |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CPU architecture | 64-bit Quad-Core ARM Cortex-A53                                                                                                                                                                                                 |
| CPU frequency    | 1.6 GHz                                                                                                                                                                                                                         |
| CPU power        | 2.3 DMIPS/MHz                                                                                                                                                                                                                   |
| Flash memory     | 8 GB of eMMC <ul style="list-style-type: none"> <li>• 2.18 GB for Router Apps</li> <li>• 474 MB for customer data</li> <li>• 231 MB for system extensions</li> <li>• The remaining space is reserved for the system.</li> </ul> |
| RAM size         | 1 GB                                                                                                                                                                                                                            |
| Watchdog         | HW watchdog                                                                                                                                                                                                                     |
| RTC              | Battery backup RTC                                                                                                                                                                                                              |
| TPM              | Trusted Platform Module (TPM) 2.0                                                                                                                                                                                               |
| SIM Slots        | 2× SIM (Mini SIM – 2FF)<br>1× Chip SIM (MFF2) <sup>1</sup>                                                                                                                                                                      |

Table 26: System configuration

<sup>1</sup>Not assembled by default, for dedicated customer orders only.

# Appendix A: Troubleshooting

## Warning

If you cannot connect to the router from your PC, your network card may be configured in a way that prevents a connection. Try one or more of the following steps to resolve the issue:

- Ensure your PC's network card is configured to obtain an IP address automatically from a DHCP server (the router's DHCP server is enabled by default).
- Connect the router to the PC via a network switch.
- Connect the PC directly to the router, but start the router first and wait for it to initialize completely before starting the PC.

### Ethernet Connection Fails or Is Unstable

- On the router's *Configuration* → *LAN* page, you can disable auto-negotiation and manually set a specific link speed and duplex mode. This can resolve compatibility issues with some network devices.

### Mobile WAN Connection Fails or Is Intermittent

- Check the signal strength on the *Status* → *Mobile WAN* page. If the signal is weak, a more powerful antenna is required. If neighboring cells have similar signal strength, a directional antenna may be necessary to lock onto the optimal cell tower.
- Enable the connection check feature on the *Configuration* → *Mobile WAN* page in the *Check connection* section. Select the *Enable + bind* option. This will send periodic pings to check connectivity and restart the connection if it fails. The "bind" option ensures the ping is always sent through the Mobile WAN interface.

### Cannot Establish Mobile WAN Connection

- Verify all settings on the *Configuration* → *Mobile WAN* page, including the *APN*, *username*, *password*, and *IP address*. For many public networks, these fields can be left blank.
- Check if the SIM card requires a PIN. If so, enter it on the *Administration* → *Unlock SIM Card* page.
- For private APN networks, it is often not recommended to obtain DNS server addresses from the operator. Disable this option on the *Configuration* → *Mobile WAN* page.
- Check the *Status* → *System Log* for error messages that can help diagnose the issue.

### Cannot Connect to a Device Behind the Router from the Internet (NAT)

- The device behind the router must be configured to use the router's IP address as its default gateway.

### Cannot Access a Web Server Behind the Router via NAT

- Remote HTTP access to the router itself must be disabled. This can be done on the *Configuration* → *NAT* page.
- On the same page, enable the *Send all remaining incoming packets to default server* feature and enter the IP address of your web server.
- Ensure the web server's default gateway is set to the router's IP address.

### DynDNS Does Not Work

- DynDNS will not work with a private APN if the router's IP address is not publicly accessible.
- If your DynDNS hostname resolves to the same private IP address that is assigned to the router, it means your mobile operator is using NAT or a firewall, preventing direct connections.

- You can verify operator NAT by pinging a server with a static public IP and comparing the source IP (seen by the server) with the IP address shown on the router's status page.
- You can test for a firewall by trying to access the router's web interface remotely.
- The operator may not be providing DNS server addresses. Without DNS, the router cannot resolve the DynDNS service hostname. The System Log would show errors like:
  - Error resolving hostname: no such file or directory
  - Connect to DynDNS server failed

#### **L2TP or IPsec Tunnel Fails to Establish**

- Check the *Status* → *System Log* for specific error messages related to the VPN tunnel negotiation.

#### **IPsec Tunnel Establishes, but No Data Is Transferred**

- This is typically caused by incorrect routing rules or a misconfigured default gateway on either the client device or the remote network.

#### **Router Reverts to Online Mode After a Reboot, Despite Being Set to Offline via SMS**

- State changes made via SMS commands are temporary and do not alter the saved configuration. They remain in effect only until the router is rebooted.

#### **Serial Communication Is Not Working**

- Verify that your router model is equipped with a serial port. Check the serial communication settings on the *Configuration* → *Expansion Port* page.

#### **Is the Router Cisco Compatible?**

- No. The router's operating system (ICR-OS) is based on Linux, not Cisco IOS. Therefore, Cisco configuration commands cannot be used.
- However, since all network connections are based on open standards, the router is fully compatible and can be connected to Cisco devices or any other standard networking equipment.

#### **FTP or SFTP Does Not Work**

- **FTP** is available on v2 platform routers only. Ensure it is enabled in *Configuration* → *Services* → *FTP*. Connect using any FTP client to port **21** with the same username and password as the web interface.
- **SFTP** (SSH File Transfer Protocol) is available on all routers. Ensure SSH is enabled in *Configuration* → *Services* → *SSH*. Connect using any SFTP-capable client (like FileZilla or WinSCP) to port **22** with the same credentials as the web interface.

#### **How to Access the Router's Command Line**

- You can connect to the router's command line using SSH (all routers) or Telnet (v2 routers only).
- **SSH** is enabled by default. You can verify this in *Configuration* → *Services* → *SSH*. Use any SSH client to connect to the router's IP address on port **22**.
- **Telnet** can be enabled on v2 routers in *Configuration* → *Services* → *Telnet*.
- For both methods, use the same username and password as for the web interface.

# Appendix B: Customer Support

## Customer Support for Europe

### **Advantech Czech s.r.o.**

Sokolska 71  
562 04, Usti nad Orlici  
Czech Republic

Phone: +353 91 792444  
Fax: +353 91 792445  
E-mail: [iiotcustomerservice@advantech.eu](mailto:iiotcustomerservice@advantech.eu)  
Web: [www.advantech.com](http://www.advantech.com)

## Customer Support for NAM

### **Advantech North America**

707 Dayton Road  
Ottawa, IL 61350 USA

Phone: +1-800-346-3119 (Monday – Friday, 7 a.m. to 5:30 p.m. CST)  
Fax: +1-815-433-5109  
E-mail: [support.iiot.ana@advantech.com](mailto:support.iiot.ana@advantech.com)  
Web: [www.advantech.com](http://www.advantech.com)

## Customer Support for Asia

Phone: +886-2-2792-7818 #1299 (Monday – Friday, 9 a.m. to 5:30 p.m. UTC+8)  
Fax: +886-2-2794-7327  
E-mail: [icg.support@advantech.com.tw](mailto:icg.support@advantech.com.tw)  
Web: [www.advantech.com](http://www.advantech.com)

# Appendix C: Regulatory & Safety Information

## Safety Notices

For your safety and proper operation of the device, please observe the following instructions:

- The router must comply with all applicable international, national, and local regulations, including any specific restrictions concerning its use in designated applications and environments.
- To avoid personal injury or damage to the device, use only accessories that are approved or supplied by the manufacturer. Unauthorized modifications or the use of non-approved accessories may damage the router, violate regulations, and void the warranty.
- Do not attempt to open the router enclosure under any circumstances.
- Before handling the SIM card, always switch off the router and disconnect it from the power supply. Handle the SIM card with care to avoid damage or electrostatic discharge.

### Important



This equipment is not suitable for use by or near young children. Small children could accidentally swallow the SIM card.

- Always ensure that the power supply voltage does not exceed 48 V DC.
- Do not expose the router to harsh environmental conditions. Protect it from dust, moisture, and excessive temperatures.
- Use only routers with proper certifications and markings in areas containing flammable or explosive materials (such as gas stations, chemical plants, or locations with explosives). In these environments, always follow the applicable restrictions regarding the use of radio devices.
- When traveling by airplane, always switch off the router. Using the router on board may endanger flight safety, interfere with mobile networks, and violate local regulations. Non-compliance can result in suspension or cancellation of telecommunications services or legal penalties.
- Take special care when operating the router in close proximity to personal medical devices such as cardiac pacemakers or hearing aids. If in doubt, consult the manufacturer of the medical device or your physician.
- This device may cause interference if used near television sets, radio receivers, or personal computers.
- Maintain a minimum separation distance of at least 20 cm between the router and the human body during operation.
- It is strongly recommended to regularly back up all critical configuration data stored in the router's memory.
- **Specific Usage Restrictions for 5 GHz Wi-Fi:** This device operates in the 5150–5350 MHz frequency band, which is restricted to **indoor use only** within the European Union, EFTA countries, and Northern Ireland. Outdoor use in this frequency band is prohibited to prevent harmful interference with other radio services.

|  |    |    |    |    |    |    |    |    |    |    |    |
|--|----|----|----|----|----|----|----|----|----|----|----|
|  | AT | BE | BG | CY | CZ | DE | DK | EE | EL | ES | FI |
|  | FR | HR | HU | IE | IT | LT | LU | LV | MT | NL | PL |
|  | PT | RO | SE | SI | SK | IS | LI | NO | CH | TR | UK |

## Product Disposal Instructions

The WEEE directive (Waste Electrical and Electronic Equipment: 2012/19/EU) ensures the environmentally responsible recycling and recovery of electronic products. This device contains high-quality materials and components suitable for recycling. At the end of its life, **do not dispose of this product with ordinary commercial waste**. The router also contains a battery. Remove the battery before disposing of the device, and ensure the battery is disposed of separately and in accordance with local regulations. For detailed information on product and battery disposal, consult your supplier's terms and conditions.

## Appendix D: Related Documents

[1] *ICR-4[12]00 Configuration Manual* (see *Documents to download* → *Manuals* section)

[EP] Product-related documents and applications can be obtained on **Engineering Portal** at <https://icr.advantech.com/download> address.



We, Advantech Czech s.r.o., declare that the radio equipment narrated in this user's manual complies with Directive **2014/53/EU**.



We, Advantech Czech s.r.o., declare that the radio equipment narrated in this user's manual complies with Radio Equipment Regulations 2017 (**S.I. 2017 No. 1206**).

The full text of the EU Declaration of Conformity is available at the following internet address:  
[icr.advantech.com/doc](http://icr.advantech.com/doc)